

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Inop table does not apply.

ALSF-2

ⓘ


ⓘ

MISSED APPROACH: Climb to 800, then climbing left turn to 2500 direct EARTH and hold.

ORLANDO APP CON
134.95 281.425

NASA TOWER ★
128.55 (CTAF) 284.0

GND CON
121.75

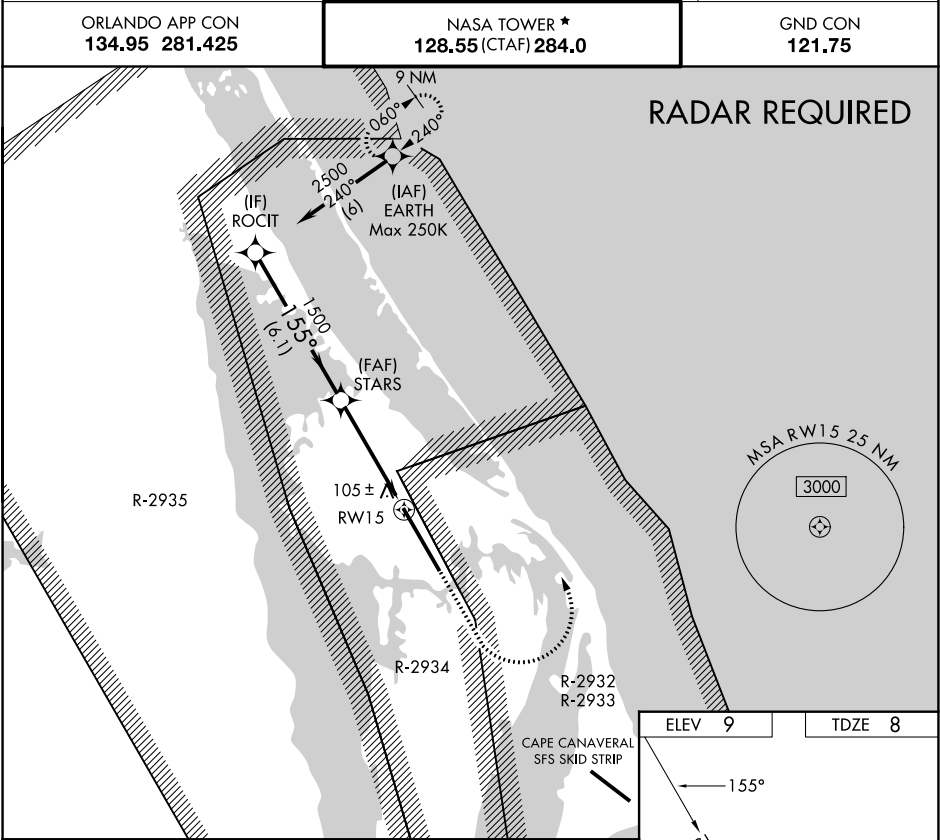

ROCIT

2500

GP 3.00°
TCH 55

STARS

1500

RW15

105±

800

2500

EARTH

*0.9 NM to RW15

*LNAV only

6.1 NM

3.6 NM

0.9 NM

CATEGORY	A	B	C	D	E
LPV DA	208-1		200 (200-1)		
LNAV/VNAV DA	286-1		278 (300-1)		
LNAV MDA	360-1		352 (400-1)		
CIRCLING	420-1 411 (500-1)	460-1 451 (500-1)	940-2¾ 931 (1000-2¾)	940-3	931 (1000-3)

