RNAV (GPS) RWY 35
LOUISIANA RGNL (REG)

WAAS CH 45940 W35A	APP CRS 349°	Rwy Ldg 5003 TDZE 14 Apt Elev 14

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2000 direct AYUYE and hold.

AWOS-3PT	BTR ASOS	BATON ROUGE APP CON★	GCO	UNICOM
121.175	125.2	133.225 278.3	135.075	123.0 (CTAF) L

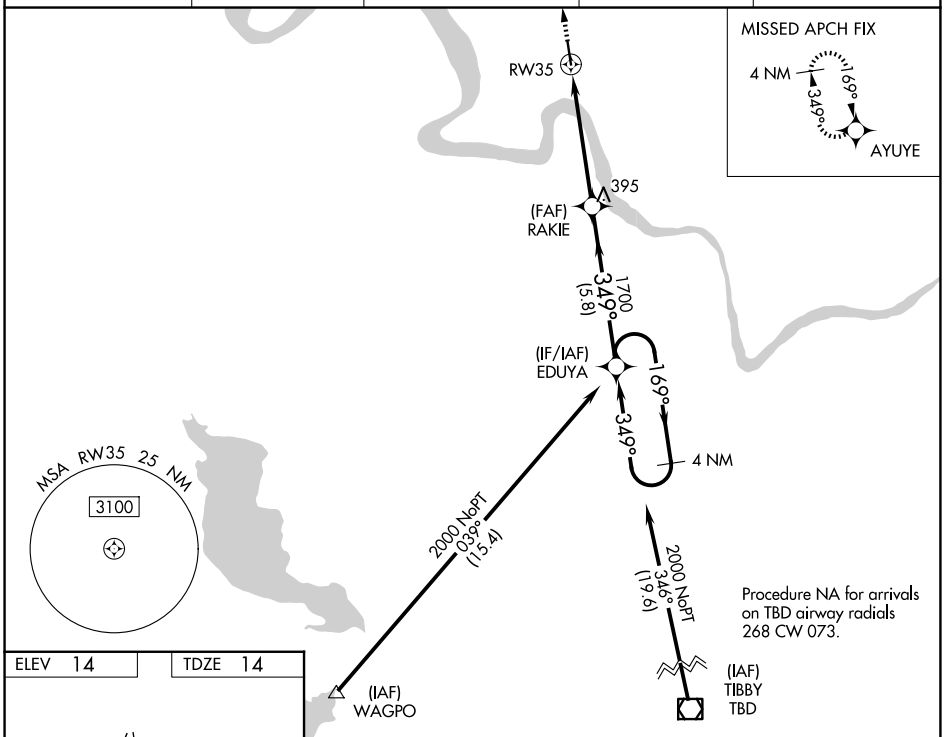

ELEV 14 TDZE 14

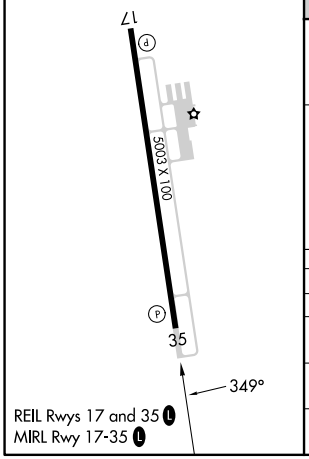

REIL Rwys 17 and 35 L
MIRL Rwy 17-35 L

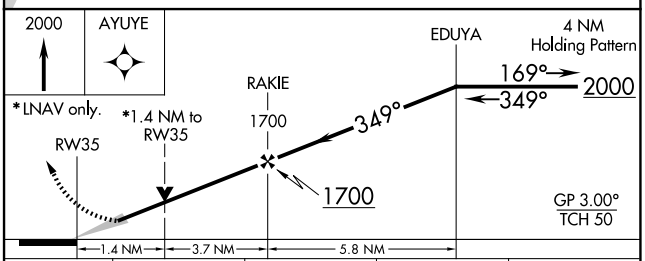

CATEGORY	A	B	C	D
LPV DA	264-¾ 250 (300-¾)			
LNAV/VNAV DA	417-1⅜ 403 (500-1⅜)			
LNAV MDA	500-1 486 (500-1)		500-1⅜ 486 (500-1⅜)	
CIRCLING	500-1 486 (500-1)	520-1 506 (600-1)	700-2 686 (700-2)	700-2¼ 686 (700-2¼)

SC-4, 03 SEP 2026 to 01 OCT 2026