

WAAS CH 61306 W34A	APP CRS 344°	Rwy Ldg 6101 TDZE 2201 Apt Elev 2211
--	------------------------	---


RNAV (GPS) RWY 34
DEER PARK (DEW)

RNP APCH - GPS.

- ▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
▲ When local altimeter setting not received, use GEG altimeter setting: increase LPV DA to 2536 feet; increase LNAV/VNAV DA to 2621 feet; increase all MDAs 80 feet and LNAV visibility Cat C ½ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cat D ¼ SM. Circling NA west of Rwy 16-34. Baro-VNAV and VDP NA when using GEG altimeter setting.

MISSED APPROACH: Climb to 8100 direct WUSED and via 036° track to DIANN and hold, continue climb-in-hold to 8100.

ASOS 135.175	SPOKANE APP CON 123.75 282.25	UNICOM 123.0 (CTAF) L
------------------------	---	--

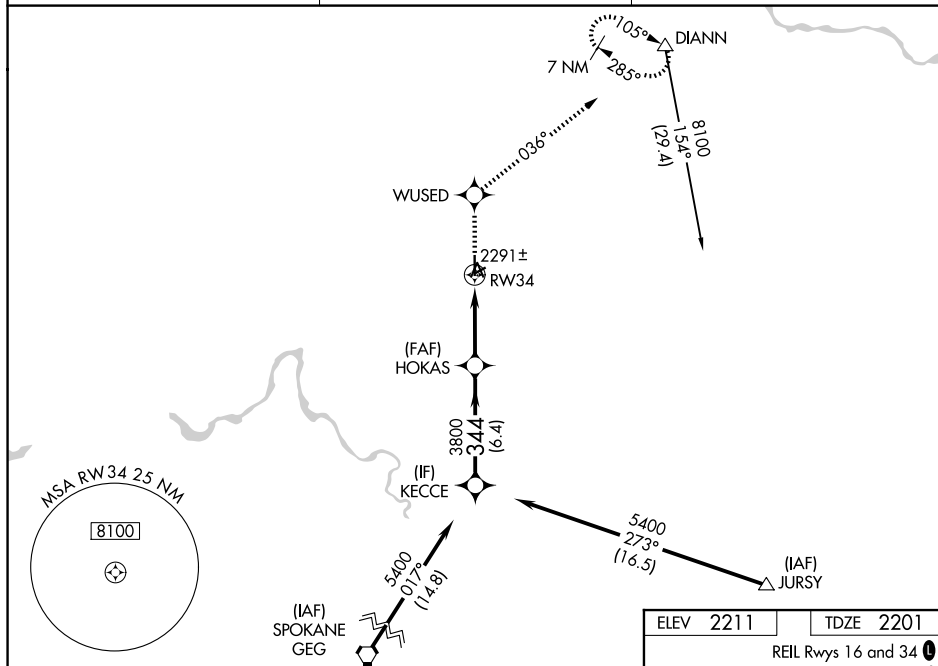

8100 ↑	WUSED ✱	036° tr	DIANN △	HOKAS 3800 3800 344° 5400 KECCE 1.2 NM to RW34 1.2 3.7 NM 6.4 NM Procedure Turn NA GP 3.00° TCH 40			
CATEGORY	A	B	C	D			
LPV DA	2466-1		265 (300-1)				
RNAV/ VNAV	DA	2551-1¼		350 (400-1¼)			
RNAV MDA	2600-1	399 (400-1)	2600-1½ 399 (400-1½)	2600-1¼ 399 (400-1¼)			
CIRCLING	2700-1	489 (500-1)	2700-1½ 489 (500-1½)	2860-2 649 (700-2)			

