

|                                        |                        |                                                                        |
|----------------------------------------|------------------------|------------------------------------------------------------------------|
| WAAS<br>CH <b>86708</b><br><b>W06A</b> | APP CRS<br><b>060°</b> | Rwy Ldg<br>TDZE<br>Apt Elev<br><b>5000</b><br><b>657</b><br><b>666</b> |
|----------------------------------------|------------------------|------------------------------------------------------------------------|


RNAV (GPS) RWY 6

PONTIAC MUNI (PNT)

**⚠** DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Bloomington/Normal altimeter setting. When local altimeter setting not received, use Bloomington/Normal altimeter setting: increase LPV DA to 1138 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1339 feet and all visibilities 1 SM; increase all MDAs 100 feet and Circling Cat C visibility ½ SM. Visibility reduction by helicopters NA.

MISSED APPROACH:  
Climb to 3000 direct  
KEJDO and hold.

|                          |                                       |                                   |
|--------------------------|---------------------------------------|-----------------------------------|
| AWOS-3<br><b>119.675</b> | CHICAGO CENTER<br><b>123.75 259.1</b> | UNICOM<br><b>123.075 (CTAF) 1</b> |
|--------------------------|---------------------------------------|-----------------------------------|

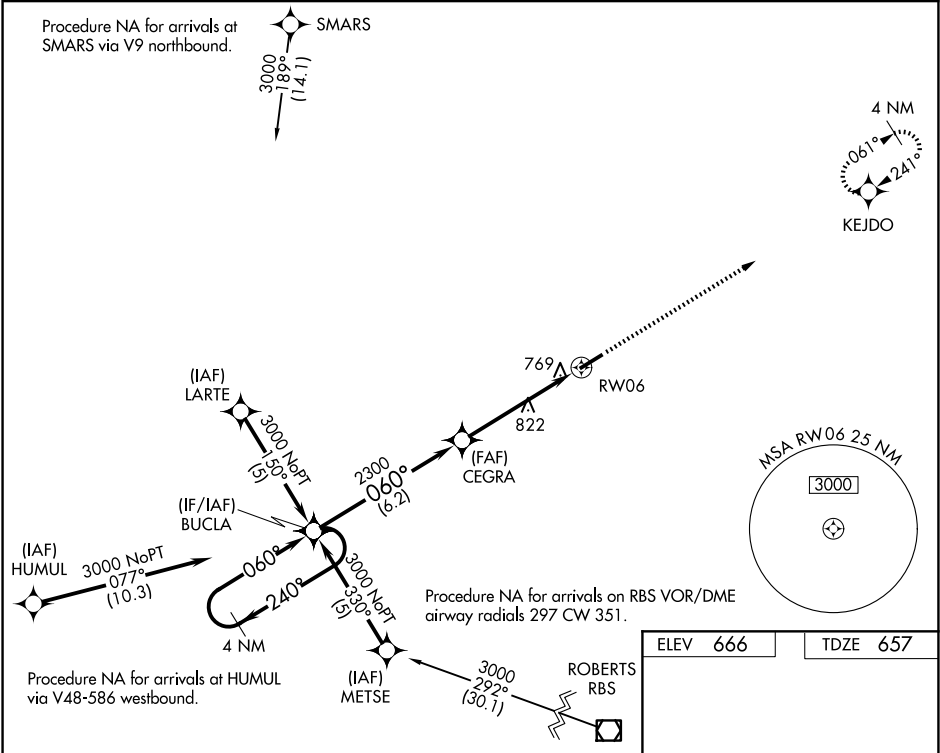

| CATEGORY     | A                     | B                     | C                       | D  |
|--------------|-----------------------|-----------------------|-------------------------|----|
| LPV DA       | 1040-1½               | 383 (400-1½)          |                         | NA |
| LNAV/VNAV DA | 1071-1½               | 414 (500-1½)          |                         | NA |
| LNAV MDA     | 1080-1                | 423 (500-1)           | 1080-1¼<br>423 (500-1¼) | NA |
| CIRCLING     | 1180-1<br>514 (600-1) | 1200-1<br>534 (600-1) | 1320-1¾<br>654 (700-1¾) | NA |

MIRL Rwy 6-24 1

EC-3, 03 SEP 2026 to 01 OCT 2026

EC-3, 03 SEP 2026 to 01 OCT 2026