

WAAS CH 48909 W21A	APP CRS 209°	Rwy Ldg TDZE 948 Apt Elev 948
--	------------------------	---

RNAV (GPS) Z RWY 21

GEORGETOWN-SCOTT COUNTY RGNL (27K)



⚠


NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 46° C (114° F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1186, LNAV/VNAV DA to 1460, and all MDA 40 feet; increase LPV all Cats and LNAV Cats C/D and Circling Cat D visibility ¼ SM. Baro-VNAV and VDP NA with Lexington altimeter setting.

MISSED APPROACH: Climb to 3000 direct YAPUT and right turn on track 301° to SOKOC and right turn on track 049° to GENUS and hold.

AWOS-3 119.975	LEXINGTON APP CON 120.15 259.3 (040°-220°) 120.75 298.9 (221°-039°)	CLNC DEL 127.425	UNICOM 123.0 (CTAF) 📻
--------------------------	--	----------------------------	--

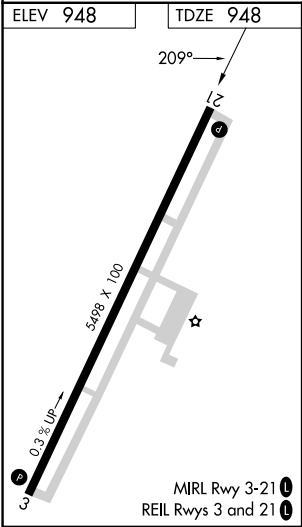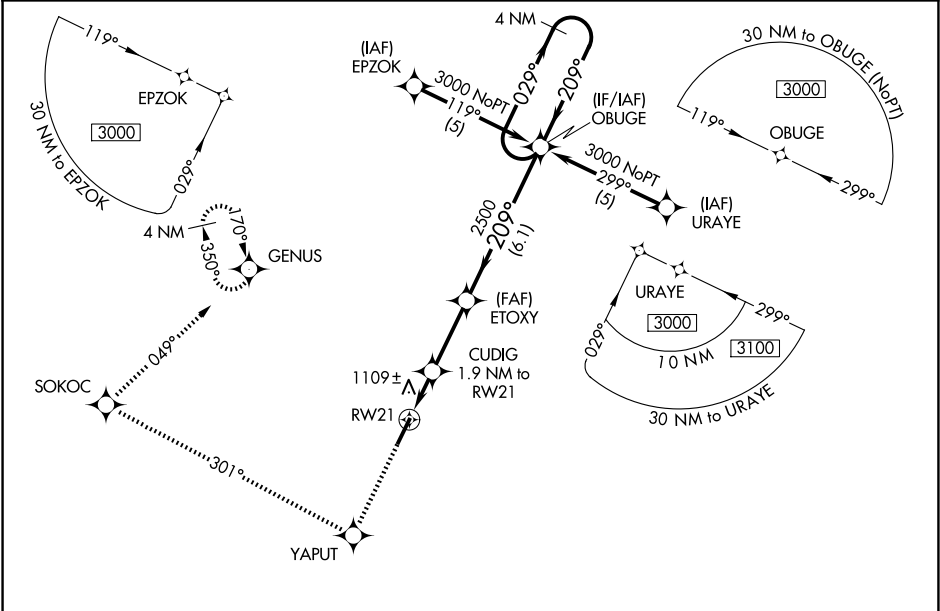

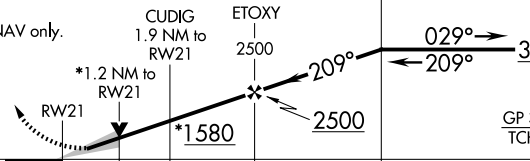3000 ↑	YAPUT ✧	 tr 301°	SOKOC ✧	 tr 049°	GENUS ✧
4 NM Holding Pattern OBUGE  *LNAV only. CUDIG 1.9 NM to RW21 ETOXY 2500 *1.2 NM to RW21 RW21 *1580 2500 029° → 3000 ← 209° GP 3.00° TCH 30 1.2 NM 0.7 NM 2.8 NM 6.1 NM					
CATEGORY	A		B	C	D
LPV DA	1148- ³ / ₄ 200 (200- ³ / ₄)				
LNAV/ VNAV DA	1422-1 ³ / ₄ 474 (500-1 ³ / ₄)				
LNAV MDA	1360-1	412 (500-1)	1360-1 ¹ / ₄ 412 (500-1 ¹ / ₄)		
CIRCLING	1420-1	472 (500-1)	1560-1 ³ / ₄ 612 (700-1 ³ / ₄)	1660-2 ¹ / ₄ 712 (800-2 ¹ / ₄)	