

WAAS CH 63017 W16A	APP CRS 162°	Rwy Ldg 10000 TDZE 69 Apt Elev 69
--	------------------------	--

RNAV (GPS) RWY 16
NORTHWEST FLORIDA BEACHES INTL (ECP)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Destin altimeter setting and increase all DA 88 feet, increase all MDA 100 feet, and increase LNAV/VNAV all Cats visibility and LNAV Cat C and D visibility 3/8 mile. Baro-VNAV and VDP NA when using Destin altimeter setting. For inop MALSR, increase LNAV Cat C and D visibility to 1 mile. For inop MALSR when using Destin altimeter setting, increase all LPV visibility to 7/8 mile, increase all LNAV/VNAV visibility to 1 3/8 mile, and increase LNAV Cat C and D visibility to 1 3/8 mile.

MALSR



MISSED APPROACH: Climb to 500 then climbing left turn to 4000 direct SCARE and hold, continue climb-in-hold to 4000.

ATIS 119.975	TYNDALL APP CON★ 125.2	PANAMA CITY TOWER★ 118.95 (CTAF) 0	GND CON 121.65
------------------------	----------------------------------	--	--------------------------

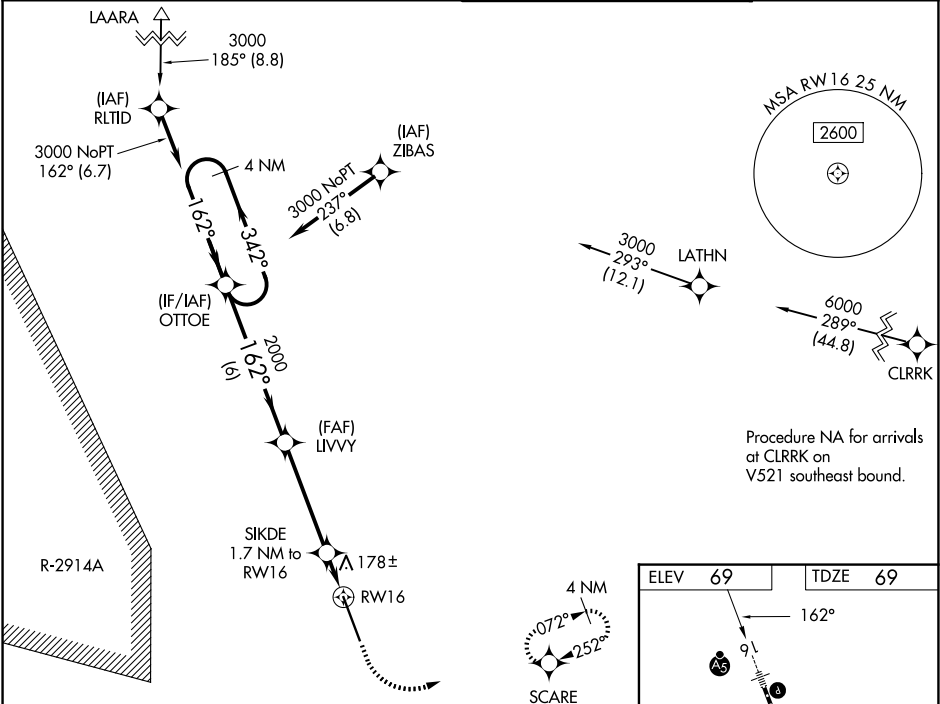

4 NM Holding Pattern

3000 ← 342° → 162° →

GP 3.00° TCH 55

OTTOE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).

LIVVY 2000

SIKDE 1.7 NM to RW16

*660

RW16

SCARE

500 4000 SCARE

*1 NM to RW16

*LNAV only.

6 NM 4.2 NM 0.7 NM 1 NM

CATEGORY	A	B	C	D
LPV DA		269-1/2	200 (200-1/2)	
LNAV/VNAV DA		478-7/8	409 (500-7/8)	
LNAV MDA	440-1/2	371 (400-1/2)	440-5/8	371 (400-5/8)
CIRCLING	520-1	451 (500-1)	520-1 1/2	620-2
			451 (500-1 1/2)	551 (600-2)

ELEV **69** TDZE **69**

162°

1000 X 150

TWR★

3A

TDZ/CL Rwy 16 0

HRL Rwy 16-34 0

REIL Rwy 34 0