
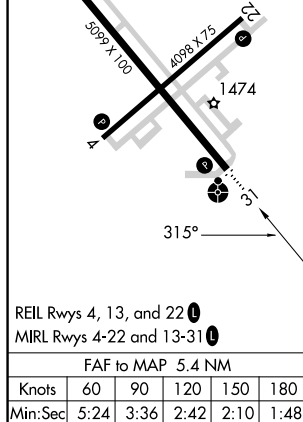


|                                  |                        |                                                                 |
|----------------------------------|------------------------|-----------------------------------------------------------------|
| LOC I-EEZ<br><b><u>110.5</u></b> | APP CRS<br><b>315°</b> | Rwy Ldg <b>5099</b><br>TDZE <b>1423</b><br>Apt Elev <b>1425</b> |
|----------------------------------|------------------------|-----------------------------------------------------------------|

ILS or LOC RWY 31  
ALEXANDRIA RGNL/CHANDLER FLD (AXN)

|                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><br>Inoperative table does not apply to S-LOC 31 Category C. | ODALS<br><br><br>MISSED APPROACH: Climb to 2500 then climbing right turn to 3500 direct AXN VOR/DME and hold. |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                        |                                          |                                 |
|------------------------|------------------------------------------|---------------------------------|
| ASOS<br><b>118.375</b> | MINNEAPOLIS CENTER<br><b>126.1 269.2</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|------------------------|------------------------------------------|---------------------------------|

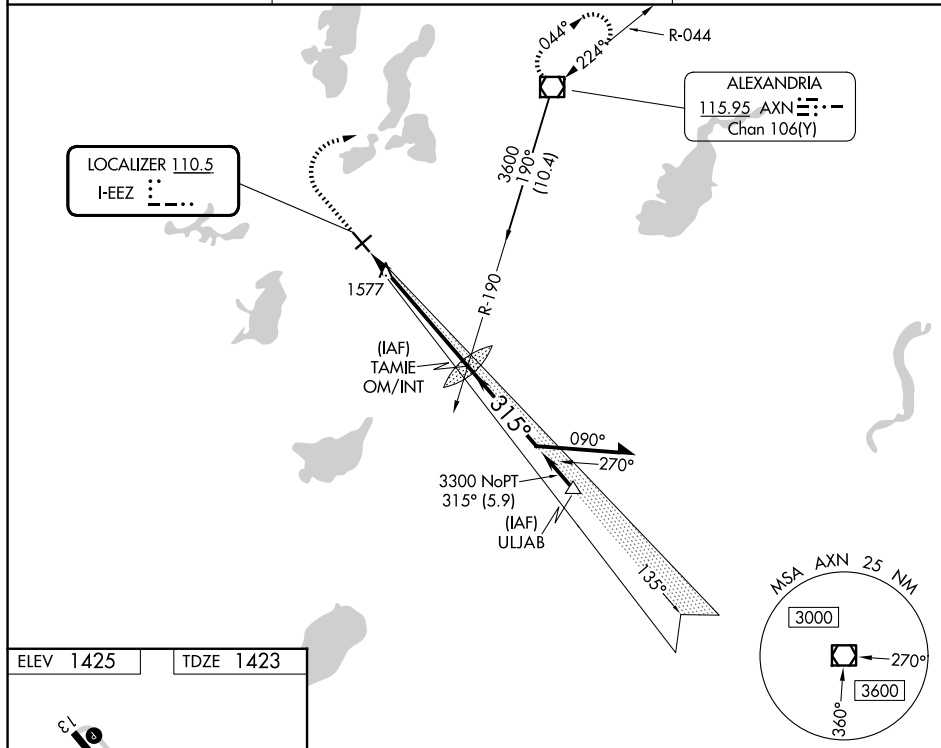

The diagram illustrates a navigation system with a 5.4 NM distance. A vertical line is labeled 3210. A horizontal line is labeled 5.4 NM. A curved arrow indicates a 135° angle. A straight arrow indicates a 315° angle. A dashed arrow indicates a 3300 frequency. A solid arrow indicates a 3600 frequency. A box labeled 2500 and 3500 is shown. A box labeled AXN is shown. A box labeled TAMIE OM/INT is shown. A box labeled Remain within 10 NM is shown. A box labeled GS 3.00° TCH 49 is shown.