

LOC I-AMA <u>110.3</u>	APP CRS 038°	Rwy Ldg 13502 TDZE 3607 Apt Elev 3607
----------------------------------	------------------------	--

ILS or LOC RWY 4
RICK HUSBAND AMARILLO INTL (AMA)

ADF or DME required.


⚠ When local altimeter setting not received, use Baroer altimeter setting and increase S-ILS 4 DA to 3960 feet and all visibilities to RVR 3000. Increase all MDAs 160 feet and S-LOC 4 visibility Cat C/D/E to RVR 6000 and Circling visibility Cat C/D ½ SM. For incop ALS, increase visibility S-ILS 4 Cat E to 4000 RVR and S-LOC 4 Cat C/D/E to RVR 6000. For incop ALS when using Baroer altimeter setting, increase visibility S-ILS 4 all Cats to 5500 and S-LOC 4 Cat C/D/E to 1½ SM. * RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Baroer altimeter setting).

MALSR



MISSED APPROACH:
Climb to 4100 then
climbing right turn to
5000 on PNH VORTAC
R-118 to CAUDE/
PNH 13 DME and hold.

ATIS	AMARILLO APP CON*	AMARILLO TOWER *	GND CON	CLNC DEL	UNICOM
118.85 350.3	119.5 307.0	118.3(CTAF) 0 257.9	121.9 348.6	121.65 239.275	122.95

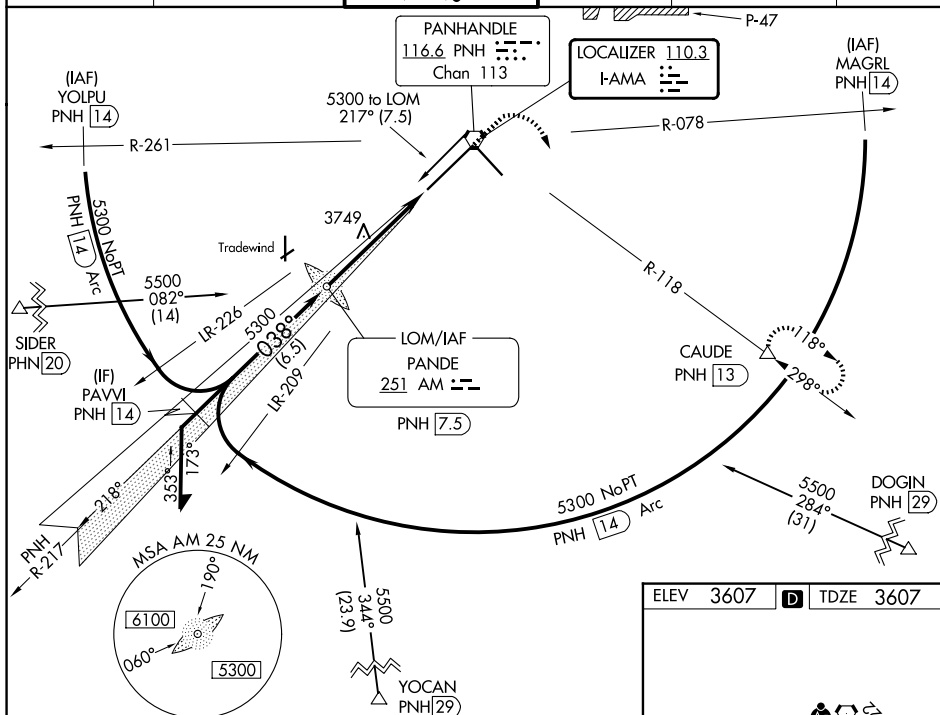

Procedure turn NA for Cat E.

within 10 NM

AM LOM
PANDE
PNH 7.5

410

5

CAUDE

PNH
2.4

CATEGORY	A	B	C	D	E
S-ILS 4 *	3807/24 200 (200-½)				
S-LOC 4	4000/24	393 (400-½)	4000/35 393 (400-½)		
CIRCLING	4080-1	473 (500-1)	4240-1 633 (700-1¼)	4280-2¼ 673 (700-2¼)	4460-3 853 (900-3)

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40