


WAAS CH 65842 W05A	APP CRS 047°	Rwy Ldg TDZE Apt Elev	3800 411 422
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 5
DANIEL FLD (DNL)

RNP APCH.	MISSED APPROACH: Climb to 3400 direct FAMGO and hold, continue climb-in-hold to 3400.
T Baro-VNAV and VDP NA when using Augusta Rgnl at Bush Fld altimeter setting. Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter not received use Augusta Rgnl at Bush Fld altimeter setting: Increase LPV DA to 716 feet, LNAV/VNAV DA to 1496 feet and all MDA 60 feet; Increase LPV all Cats visibility ½ SM, LNAV Cat A and Circling Cat C visibility ¼ SM.	

ASOS 135.275	AUGUSTA APP CON ★ 126.8 270.3	UNICOM 123.05 (CTAF) 1
------------------------	---	----------------------------------

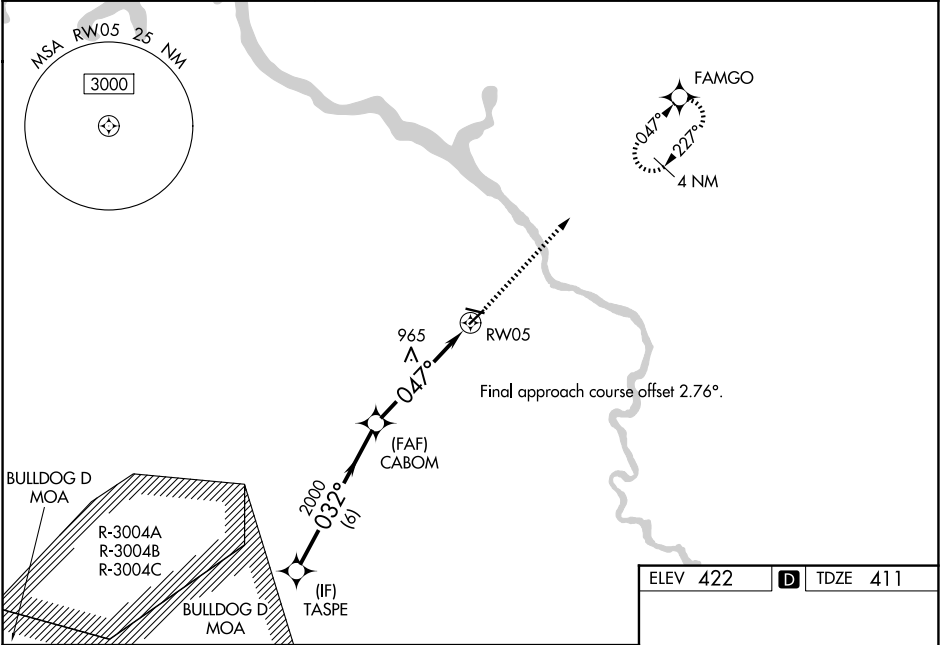

ELEV 422		D TDZE 411	
GP 3.00° TCH 50		* LNAV only.	
TASPE		CABOM	
2700		2000	
032°		047°	
6 NM		2.2 NM	
2000		RWY 5	
* 2.7 NM to RWY 5		3400 FAMGO	
CATEGORY		A B C D	
LPV DA		661-¾ 250 (300-¾)	
LNAV/VNAV DA		1441-4 1030 (1100-4)	
LNAV MDA		1280-1 1280-1¼ 1280-2½ 869 (900-2½)	
CIRCLING		1280-1¼ 858 (900-1¼) 1360-2¾ 938 (1000-2¾) 1360-3 938 (1000-3)	