
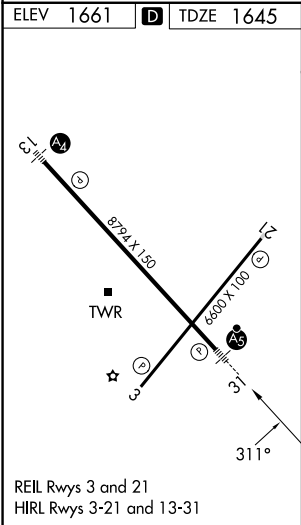


WAAS CH 56599 W31A	APP CRS 311°	Rwy Ldg 8794 TDZE 1645 Apt Elev 1661
--	------------------------	---

RNAV (GPS) RWY 31

BISMARCK MUNI (BIS)

RNP APCH - GPS.		MALSRL	MISSED APPROACH: Climb to 3800 direct WIMTO and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Inop table does not apply to LNAV/VNAV. *RVR 1800 authorized with use of FD or AP or HUD to DA.				
ATIS 119.35	BISMARCK APP CON* 126.3 298.9	BISMARCK TOWER* 118.3(CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95

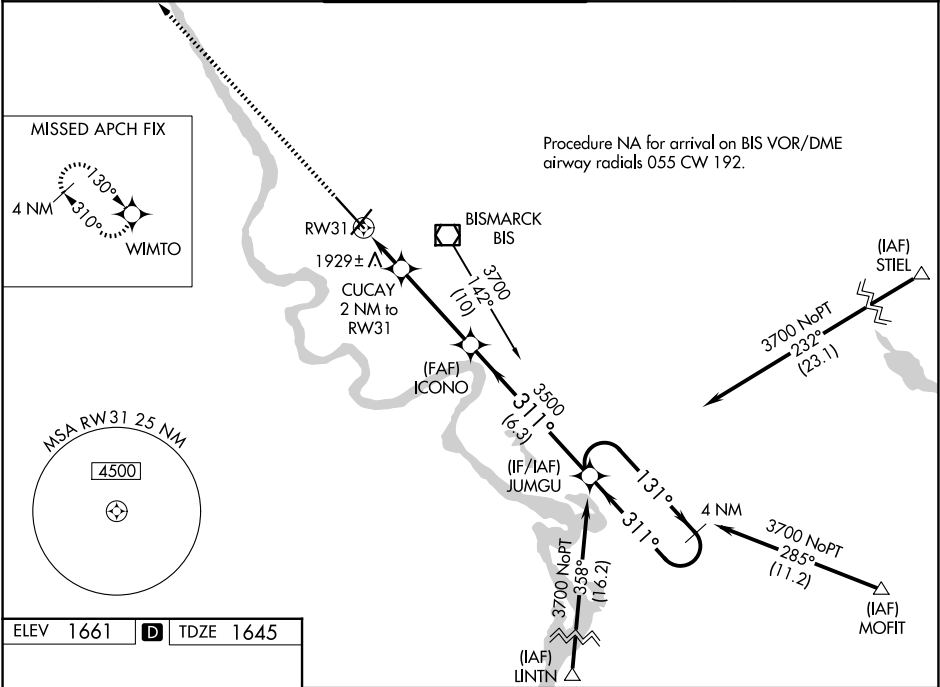

3800 WIMTO		JUMGU 4 NM Holding Pattern	
CUCAY 2 NM to RW31		ICONO 3500	
RW31 2320		3500 311°	
2 NM		3.7 NM	
CATEGORY		A B C D	
LPV DA*		1845/24 200 (200-½)	
LNAV/VNAV DA		2269-1¾ 624 (700-1¾)	
LNAV MDA		2180/24 535 (600-½) 2180/55 535 (600-1)	
CIRCLING		2200-1 539 (600-1) 2460-2¼ 799 (800-2¼) 2460-2½ 799 (800-2½)	