

VORTAC CHS 113.5 Chan 82	APP CRS 157°	Rwy Ldg 9001 TDZE 43 Apt Elev 46
--	------------------------	---

VOR Y or TACAN Y RWY 15

CHARLESTON AFB/INTL (CHS)



DME required.

T	For inop ALS, increase S-15 Cat A/B visibility to RVR 5500 and Cat C/D visibility to RVR 6000.
----------	--


ALSF-2

MISSED APPROACH: Climb to 500 then climbing left turn to 3500 on CHS VORTAC R-055 to WANDO/CHS 13 DME and hold, continue climb-in-hold to 3500.

D-ATIS 124.75	CHARLESTON APP CON 120.7 306.925	CHARLESTON TOWER 126.0 239.0	GND CON 121.9 348.6
-------------------------	--	--	-------------------------------

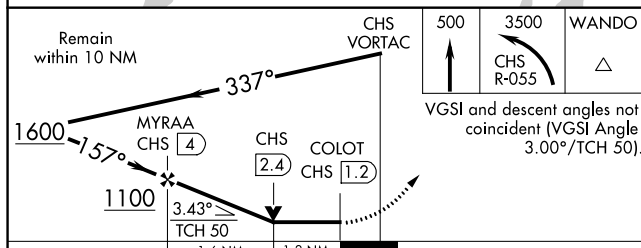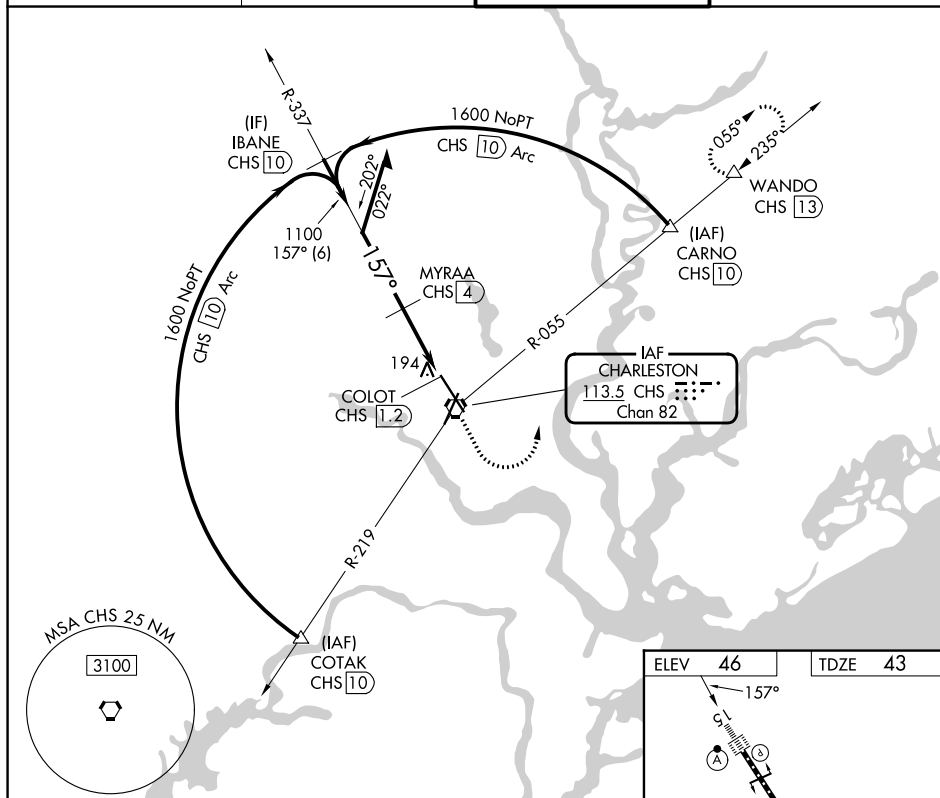

CATEGORY	A	B	C	D
S-15	460/24	417 (500- $\frac{1}{2}$)	460/40	417 (500- $\frac{3}{4}$)
CIRCLING	540-1	494 (500-1)	540-1 $\frac{1}{2}$ 494 (500-1 $\frac{1}{2}$)	740-2 $\frac{1}{4}$ 694 (700-2 $\frac{1}{4}$)

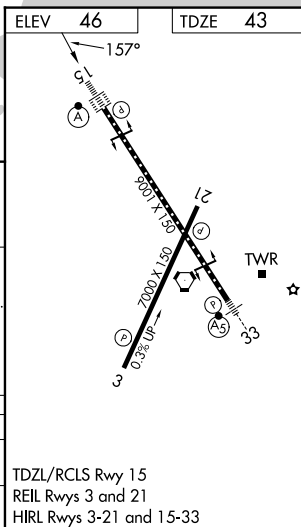

VOR Y or TACAN Y RWY 15