
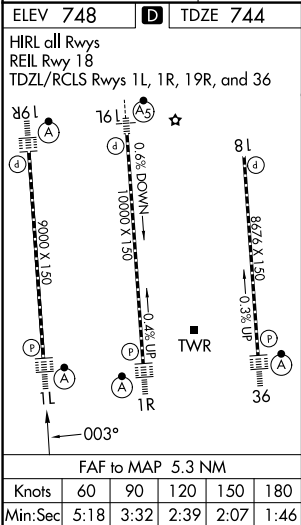


LOC/DME I-XUU 110.15 Chan 38 (Y)	APP CRS 003°	Rwy Ldg TDZE Apt Elev	9000 744 748
--	------------------------	-----------------------------	---

ILS or LOC RWY 1L
CHARLOTTE/DOUGLAS INTL (CLT)

DME or RADAR required. RADAR required for procedure entry.		ALSF-2	MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on heading 280° and on BZM VOR/DME R-184 to BUDKE/BZM 26.5 DME/RADAR and hold.
Simultaneous approach authorized. Circling NA at night.			
D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 257.2 (180°-359°) 120.05 (120°-295°) 307.8 (360°-179°) 134.75 (296°-360°)	118.1 257.8 (18-36) 126.4 257.8 (1R-19L) 133.35 257.8 (1L-19R)	121.8 348.6 (W) 121.9 348.6 (E)

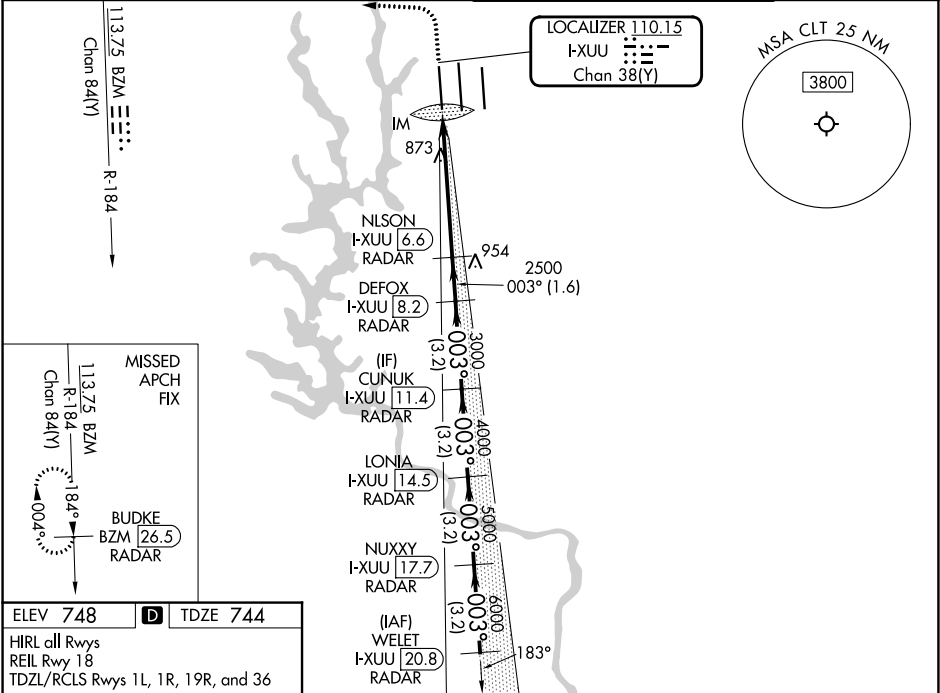

ELEV 748	D	TDZE 744	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).		WELET I-XUU 20.8 RADAR
HIRL all Rwy					
REIL Rwy 18					
TDZL/RCLS Rwy 1L, 1R, 19R, and 36					
19R	16	8L			
1L	1R	36			
FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46