

WAAS
CH **65614**
W04A

APP CRS
047°

Rwy Ldg
TDZE **619**
Apt Elev **620**

RNAV (GPS) Z RWY 4R

CHICAGO MIDWAY INTL (MDW)

RNP APCH - GPS


▼

▲

Rwy 4R helicopter visibility reduction below RVR 4000 NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS 132.75	CHICAGO APP CON 128.2 353.875	MIDWAY TOWER 135.2 269.125	GND CON 118.075
-------------------------	---	--------------------------------------	---------------------------

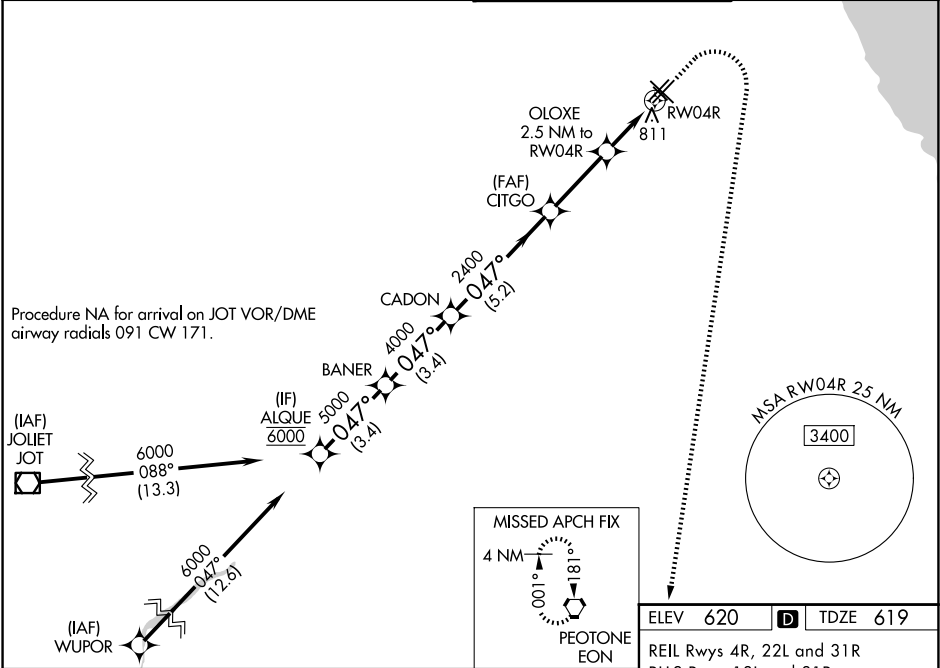

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).

ALQUE 6000 047°

BANER 5000

CADON 4000

CITGO 2400

OLOXE 2.5 NM to RW04R

1.2 NM to RW04R

RW04R

GP 3.00° TCH 50

3.4 NM 3.4 NM 5.2 NM 2.9 NM 1.3 NM 1.2 NM

CATEGORY	A	B	C	D
LPV DA	869/40	250 (300-¾)		
LNAV/VNAV DA	1097-1⅓	478 (500-1⅓)		
LNAV MDA	1080/55 461 (500-1)	1080-1⅓ 461 (500-1⅓)		
CIRCLING	1120-1 500 (500-1)	1340-2 720 (800-2)	1340-2¼ 720 (800-2¼)	