

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>90148</b><br><b>W21A</b> | APP CRS<br><b>205°</b> | Rwy Ldg <b>6101</b><br>TDZE <b>475</b><br>Apt Elev <b>482</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 21  
CINCINNATI MUNI/LUNKEN FLD (LUK)

RNP APCH - GPS.

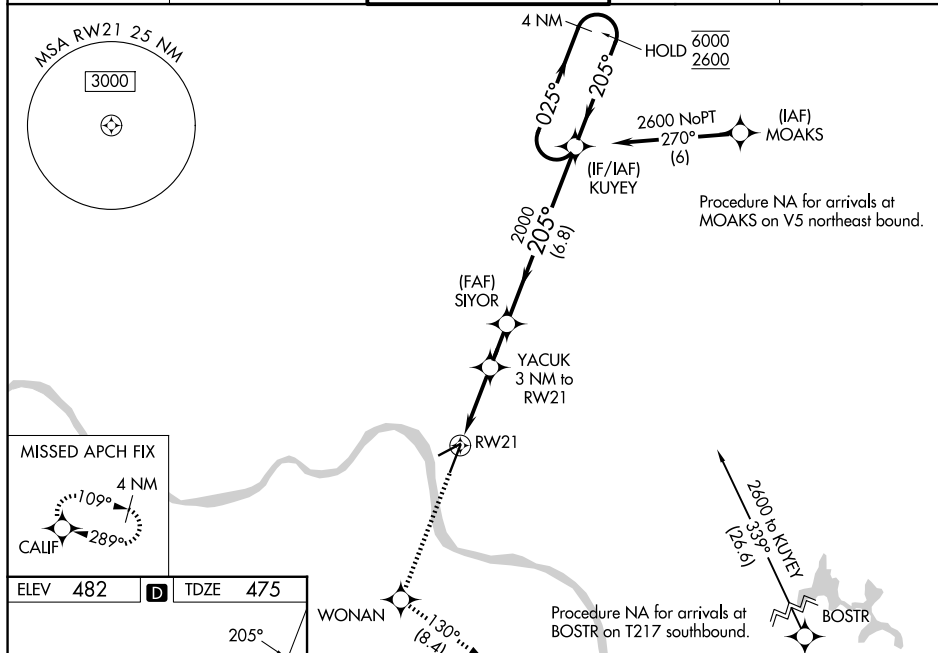
**⚠** Circling NA for Cat D north of Rwy 7-25. Circling Rwy 7 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 21 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV all Cats and LNAV Cat A and B visibility. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C and D visibility to 1% SM.

MALSR



MISSED APPROACH:  
Climb to 2500 direct  
WONAN and on track  
130° to CALIF and hold.

|               |                                    |                                        |                  |                  |
|---------------|------------------------------------|----------------------------------------|------------------|------------------|
| ATIS<br>123.6 | CINCINNATI APP CON<br>121.0 254.25 | LUNKEN TOWER ★<br>118.7 (CTAF) 0 257.8 | GND CON<br>121.9 | UNICOM<br>122.95 |
|---------------|------------------------------------|----------------------------------------|------------------|------------------|

[illegible]