


APP CRS	Rwy Ldg	9953
238°	TDZE	786
	Apt Elev	799


RNAV (RNP) Z RWY 24L
CLEVELAND-HOPKINS INTL (CLE)

RNP AR APCH.	MALSR	MISSED APPROACH: Climb to 3000 direct HASLE and on track 177° to SAROW and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). For inop ALS, increase RNP 0.19 all Cats visibility to RVR 5500.		

D-ATIS 127.85	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45
------------------	-------------------------------------	---------------------------------	-------------------------

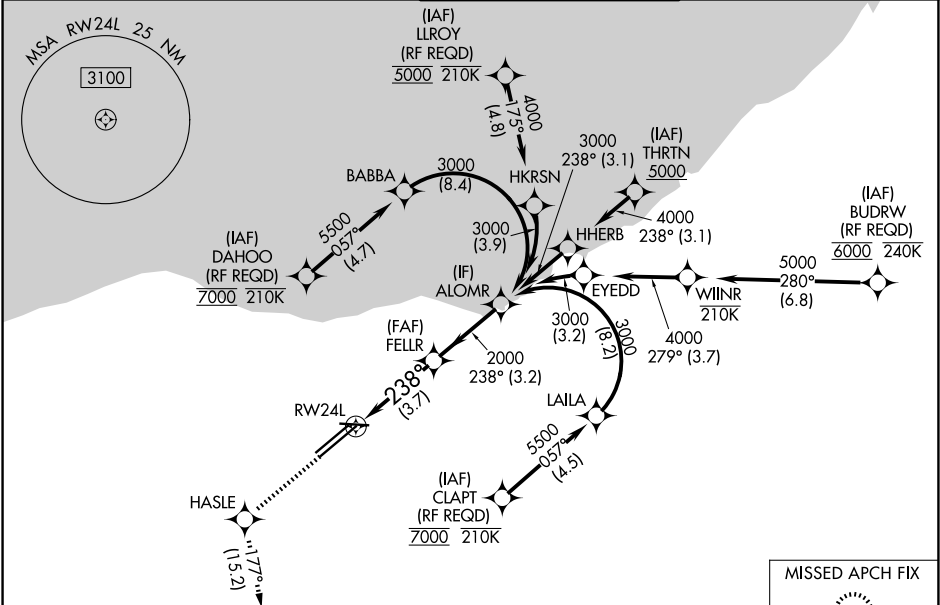

ELEV 799	D	TDZE 786
----------	---	----------



3000	HASLE	SAROW	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 48).	
CATEGORY	A	B	C	D
RNP 0.19 DA	1140/30 354 (400- $\frac{5}{8}$)			
RNP 0.30 DA	1243/45 457 (500- $\frac{7}{8}$)			
AUTHORIZATION REQUIRED				

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L and 24R
HIRL Rwy 6L-24R, 6R-24L and 10-28

CLEVELAND, OHIO
Orig 24MAY18

41°25'N-81°51'W

CLEVELAND-HOPKINS INTL (CLE)
RNAV (RNP) Z RWY 24L

EC-2, 01 OCT 2026 to 29 OCT 2026

EC-2, 01 OCT 2026 to 29 OCT 2026