



WAAS CH 53414 W29A	APP CRS 292°	Rwy Ldg 8506 TDZE 227 Apt Elev 236
--	------------------------	---

RNAV (GPS) RWY 29
COLUMBIA METRO (CAE)

RNP APCH - GPS.		For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C and D to 1½ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.		MALSR	MISSED APPROACH: Climb to 3000 direct BAPNE and hold.
ATIS 120.15	COLUMBIA APP CON 124.15 338.2 (110°-289°) 133.4 285.6 (290°-109°)	COLUMBIA TOWER 119.5 257.8	GND CON 121.9 348.6		

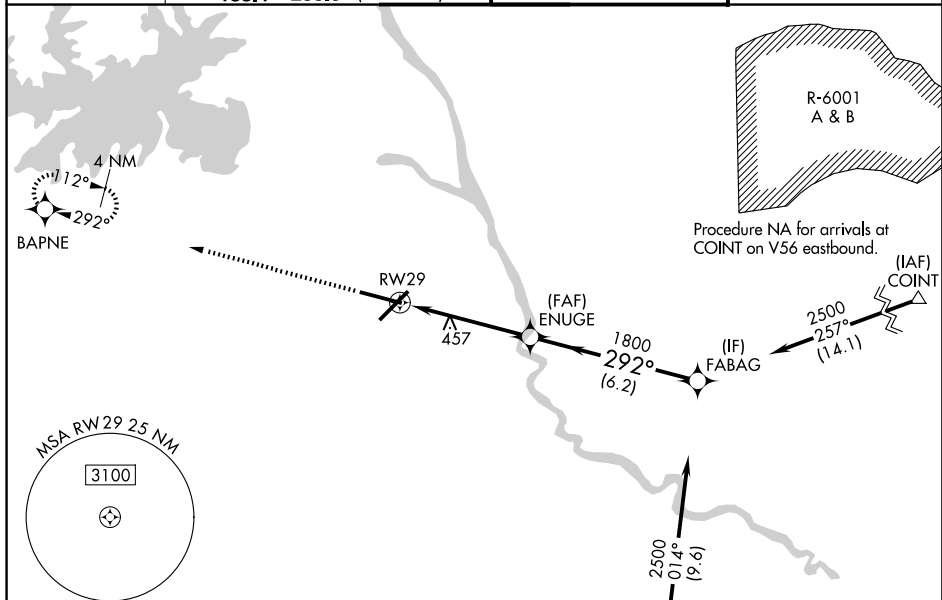


ELEV 236	D	TDZE 227
----------	----------	----------

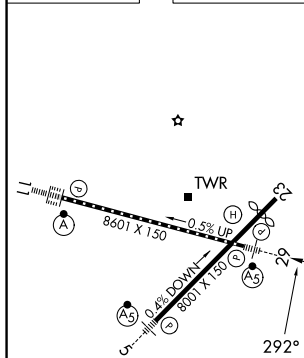

REIL Rwy 23
TDZ/CL Rwy 11
HIRL Rwy 5-23 and 11-29

Procedure NA for arrivals at ADCOM
on V53 and T441 southeast bound.

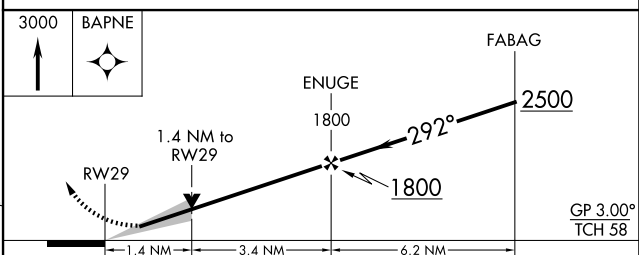

CATEGORY	A	B	C	D
LPV DA *	427/24 200 (200-½)			
INAV/ VNAV DA	544/24 317 (400-½)			544/40 317 (400-¾)
INAV MDA	720/24 493 (500-½)		720/50	493 (500-1)
CIRCLING	740-1 504 (600-1)	860-1 624 (700-1)	1040-2¼ 804 (900-2¼)	1040-2½ 804 (900-2½)