



APP CRS 133°	Rwy Ldg	7352
	TDZE	485
	Apt Elev	487

RNAV (RNP) W RWY 13L

DALLAS LOVE FLD (DAL)

RNP AR APCH. RF required.	MALSR 	MISSED APPROACH: Climb to 3000 direct DATLE and on track 115° to DUMPY and hold.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -6°C or above 54°C. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500.		

D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6
-------------------------	--	----------------------------------	--------------------------------

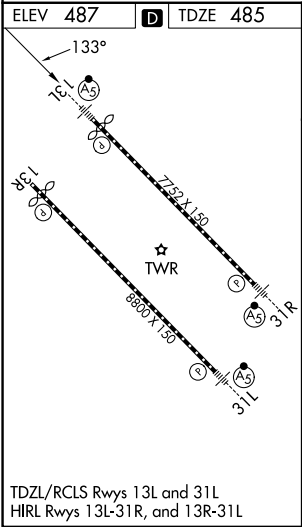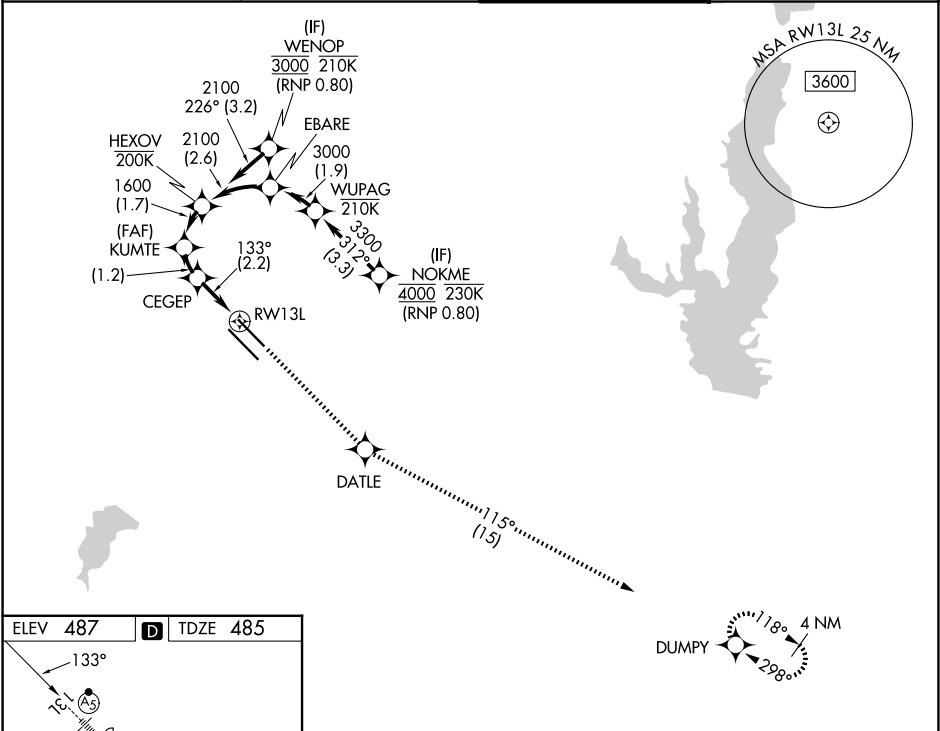

See planview for multiple IF locations.				3000 ↑	DATLE ✧	tr 115°	DUMPY ✧
HEXOV 2100 GP 3.00° TCH 40 KUMTE 1600 CECEP 1212 1600 133° RW13L 1.7 NM 1.2 NM 2.2 NM							
CATEGORY	A	B	C	D			
RNP 0.11 DA	754/24				269 (300-½)		
RNP 0.30 DA	846/40				361 (400-¾)		
AUTHORIZATION REQUIRED							