
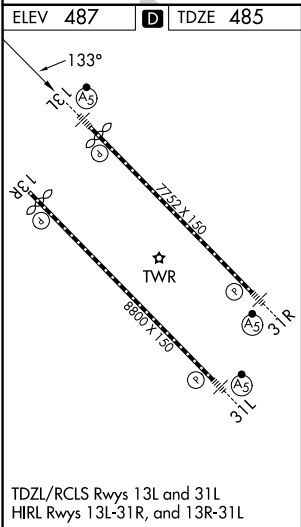


WAAS CH 50547 W13A	APP CRS 133°	Rwy Ldg 7352 TDZE 485 Apt Elev 487
--	------------------------	---

RNAV (GPS) Y RWY 13L

DALLAS LOVE FLD (DAL)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 3000 direct FAVKU and on track 116° to DUMPY and hold.
RADAR required for procedure entry.			
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C and D visibility to 1¾ SM.			
D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6

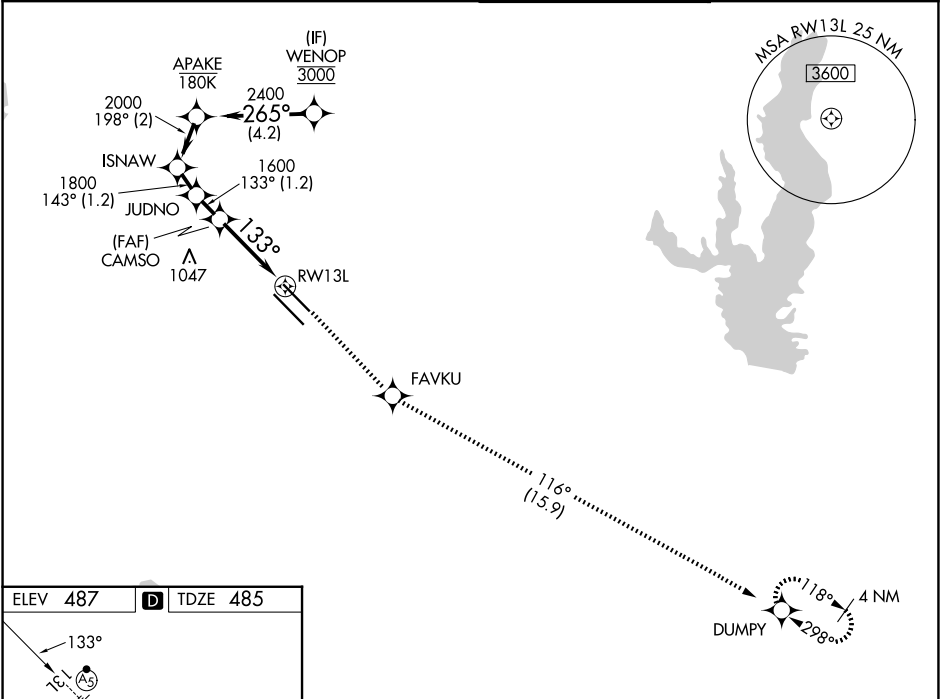

WENOP 3000 265° 2400 198° ISNAW 2000 143° JUDNO 1800 133° CAMSO 1600 1.8 NM to RW13L RW13L 116° FAVKU DUMPY GP 3.00° TCH 55 4.2 NM 2 NM 1.2 NM 1.2 NM 1.6 NM 1.8							
CATEGORY	A		B	C	D		
LPV DA			685/18	200 (200-½)			
LNAV/VNAV DA			760/24	275 (300-½)			
LNAV MDA	1100/24		615 (700-½)		1100-1 ³ / ₈	615 (700-1 ³ / ₈)	
CIRCLING	1100-1 613 (700-1)		1140-1 653 (700-1)		1280-2 ¹ / ₄ 793 (800-2 ¹ / ₄)	1520-3 1033 (1100-3)	

SC-2, 01 OCT 2026 to 29 OCT 2026

SC-2, 01 OCT 2026 to 29 OCT 2026