

WAAS CH 87123 W31B	APP CRS 313°	Rwy Ldg 6952 TDZE 487 Apt Elev 487
--	------------------------	---

RNAV (GPS) Y RWY 31R

DALLAS LOVE FLD (DAL)


RNP APCH - GPS.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cats C and D visibility to 1½ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 5000 direct FINGER and hold.

D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6
-------------------------	--	----------------------------------	--------------------------------

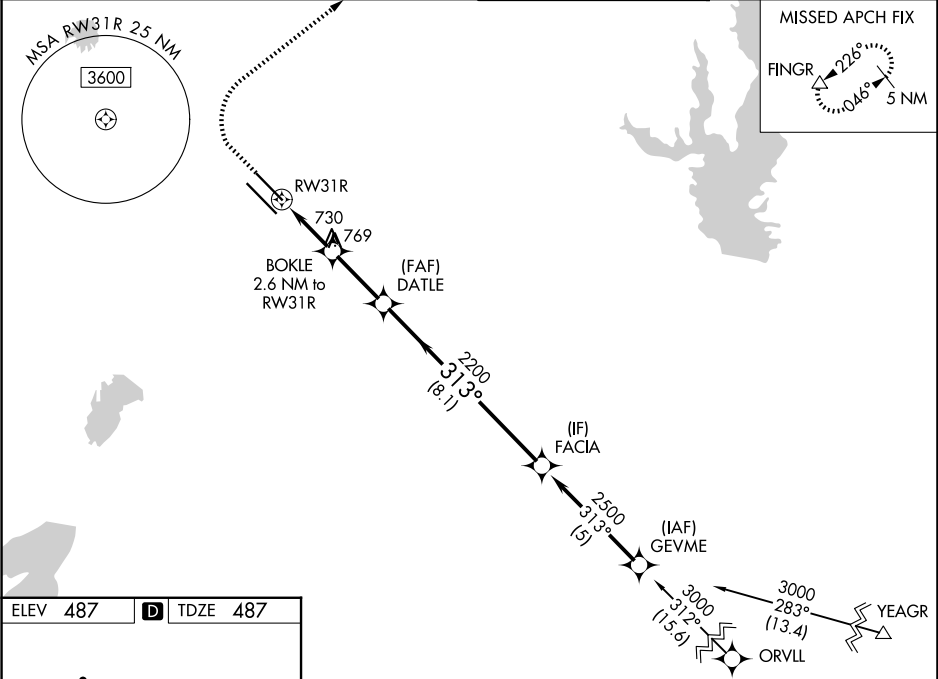

ELEV **487** **D** TDZE **487**

TDZL/RCLS Rwy's 13L and 31L
HIRL Rwy's 13L-31R and 13R-31L

1000

5000

FINGER

CATEGORY	A		B	C	D
LPV DA*	687/24		200 (200-½)		
LNAV/VNAV DA	980/50		493 (500-1)		
LNAV MDA	980/24	493 (500-½)	980/50	493 (500-1)	
CIRCLING	1080-1 593 (600-1)	1140-1 653 (700-1)	1280-2¼ 793 (800-2¼)	1520-3 1033 (1100-3)	

SC-2, 01 OCT 2026 to 29 OCT 2026

SC-2, 01 OCT 2026 to 29 OCT 2026