

LOC I-DAY <u>108.3</u>	APP CRS 185°	Rwy Ldg 8502 TDZE 996 Apt Elev 1009
----------------------------------	------------------------	--



ILS or LOC RWY 18
JAMES M COX DAYTON INTL (DAY)

T For inop ALS, increase S-LOC 18 Cat C/D visibility to RVR 6000.
Autopilot coupled approach NA below 1200.
** RVR 1800 authorized with use of FD or HUD to DA.



MISSED APPROACH: Climb to 1400 then climbing right turn to 3100 direct DQN VOR/DME and hold.

ATIS 125.8	COLUMBUS APP CON 118.85 305.2 (091°-180°) 134.45 323.15 (181°-090°)	DAYTON TOWER 119.9 257.7	GND CON 121.9
---------------	---	-----------------------------	------------------

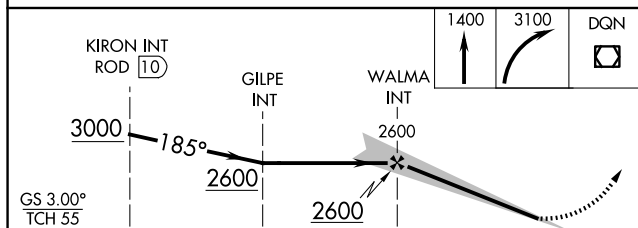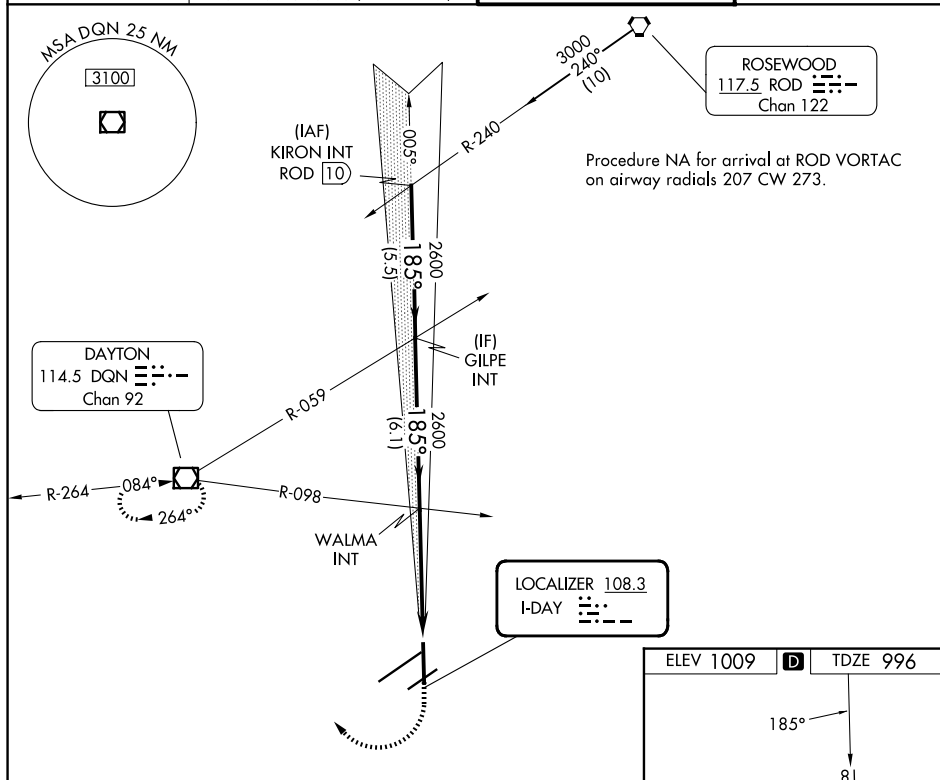

	5.5 NM		6.1 NM		4.9 NM		
CATEGORY	A		B		C		D
S-ILS 18 **	1196/24				200 (200-½)		
S-LOC 18	1400/24		404 (400-½)		1400/40		404 (400-¾)
CIRCLING	1580-1		571 (600-1)		1580-1½ 571 (600-1½)		1640-2 631 (700-2)

