
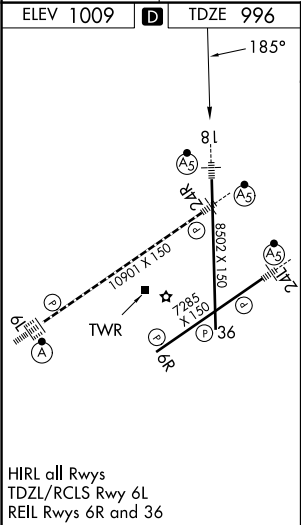


WAAS CH 86914 W18A	APP CRS 185°	Rwy Ldg TDZE 996 Apt Elev 1009
--	------------------------	--

RNAV (GPS) RWY 18
JAMES M COX DAYTON INTL (DAY)

RNP APCH.	MALS	MISSED APPROACH: Climb to 3000 direct GUPNE and track 255° to CAMMS and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cts visibility to RVR 4500. ** RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 125.8	COLUMBUS APP CON 118.85 305.2 (091°-180°) 134.45 323.15 (181°-090°)	DAYTON TOWER 119.9 257.7	GND CON 121.9
----------------------	---	------------------------------------	-------------------------

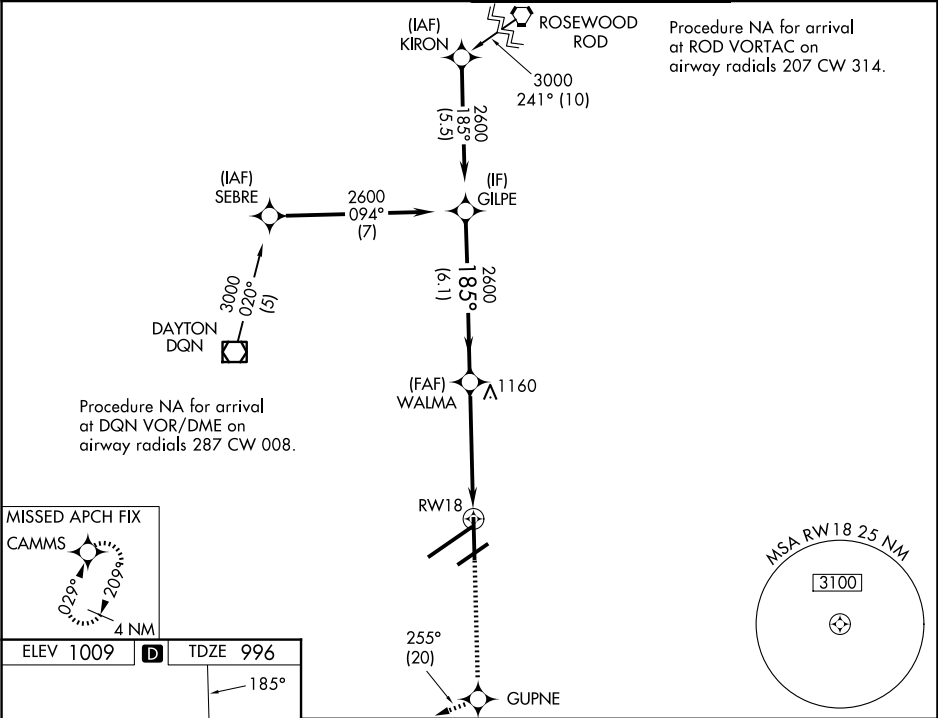

3000	GUPNE	tr 255°	CAMMS	
* LNAV only				
* 1.2 NM to RW18				
RW18				
1.2 NM 3.7 NM 6.1 NM				
WALMA 2600				
GILPE 2600				
185°				
GP 3.00° TCH 55				
CATEGORY	A	B	C	D
LPV DA **	1196/24 200 (200-½)			
LNAV/VNAV DA	1274/24 278 (300-½)			
LNAV MDA	1420/24	424 (500-½)	1420/40	424 (500-¾)
CIRCLING	1580-1	571 (600-1)	1580-1½ 571 (600-1½)	1640-2 631 (700-2)