

WAAS CH 42913 W06A	APP CRS 061°	Rwy Ldg TDZE 998 Apt Elev 1009
--	------------------------	--

RNAV (GPS) Z RWY 6L

JAMES M COX DAYTON INTL (DAY)


RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500 and LNAV Cats C/D to 1¼ SM.

ALSf-2

MISSED APPROACH: Climb to 3000 direct HEGUK and on track 331° to ICASI and on track 270° to DQN VOR/DME and hold.

ATIS 125.8	COLUMBUS APP CON 118.85 305.2 (091°-180°) 134.45 323.15 (181°-090°)	DAYTON TOWER 119.9 257.7	GND CON 121.9
----------------------	---	------------------------------------	-------------------------

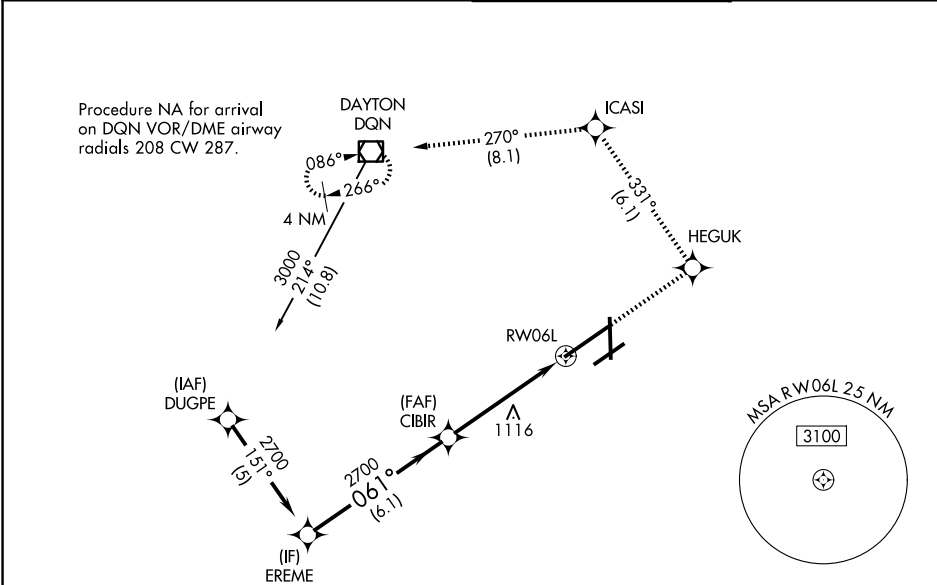

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).

EREME

CIBIR

3000

HEGUK

ICASI

DQN

2700

061°

2700

2700

GP 3.00°

TCH 51

6.1 NM

4 NM

1.1 NM

RW06L

*1.1 NM to RW06L

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	1198/18 200 (200-½)			
LNAV/VNAV DA	1366/40 368 (400-¾)			
LNAV MDA	1420/24	422 (500-½)	1420/40 422 (500-¾)	1420/50 422 (500-1)
CIRCLING	1580-1	571 (600-1)	1580-1½ 571 (600-1½)	1640-2 631 (700-2)

81

785

36

10901 X 150

8502 X 150

TWR

061°

HIRL all Rwys

TDZL/RCLS Rwy 6L

REIL Rwys 6R and 36

EC-2, 01 OCT 2026 to 29 OCT 2026

EC-2, 01 OCT 2026 to 29 OCT 2026