

WAAS CH 78002 W31A	APP CRS 311°	Rwy Ldg 9001 TDZE 958 Apt Elev 958
--	------------------------	---

RNAV (GPS) RWY 31
DES MOINES INTL (DSM)

RNP APCH - GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°
A or above 54°. For inop ALS, increase LNAV Cats C/D visibility to RVR 5500.
 Baro-VNAV and VDP NA when using Ankeny Rgnl altimeter setting.

ALSF-2





MISSED APPROACH.
Climb to 3500 direct
WATTY and hold.

ATIS 119.55	DES MOINES APP CON 123.9 307.15	DES MOINES TOWER 118.3 257.8	GND CON 121.9 348.6
-----------------------	---	--	-------------------------------

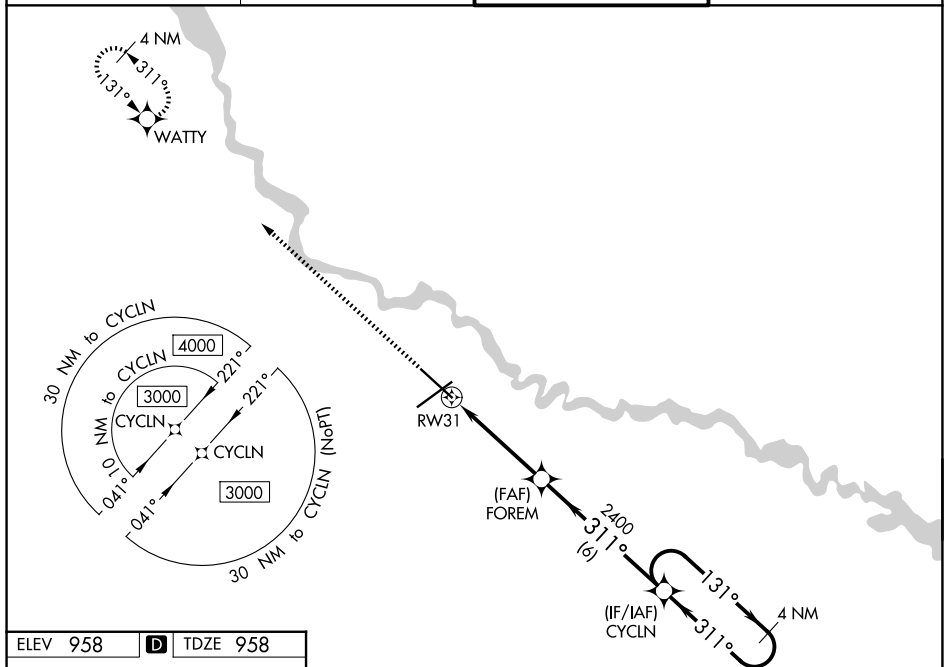

ELEV 958	D	TDZE 958
----------	----------	----------

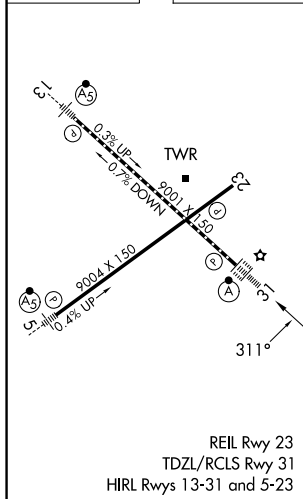

3500 ↑ WATTY 		FOREM 2400  CYCLN 4 NM Holding Pattern 			
*LNAV only 					
CATEGORY	A	B	C	D	
LPV DA	1158/18 200 (200-½)				
LNAV/VNAV DA	1354/35 396 (400-¾)				
LNAV MDA	1320/24	362 (400-½)	1320/35	362 (400-¾)	
CIRCLING	1420-1	462 (500-1)	1600-1¾ 642 (700-1¾)	1760-2½ 802 (900-2½)	

RNAV (GPS) RWY 31