


APP CRS	Rwy Ldg	10000
036°	TDZE	645
	Apt Elev	645

RNAV (RNP) X RWY 4L

DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.		ALSF-2	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct DOHNT and hold.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.30 DA all Cats visibility to RVR 6000.			
D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 135.0 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)

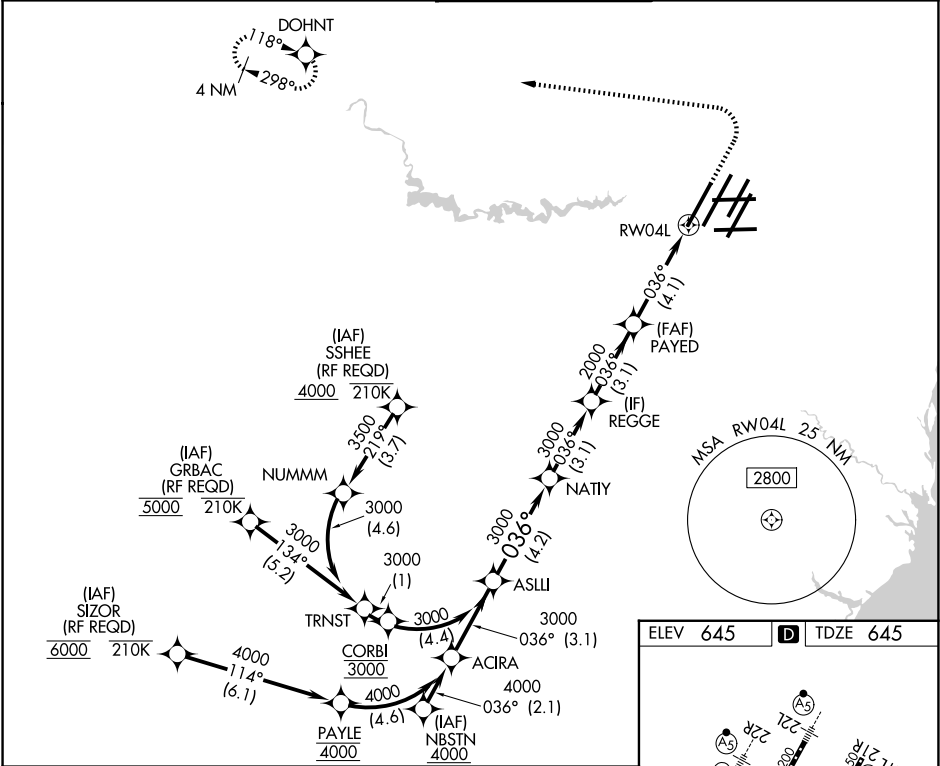

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).		1100	4000	DOHNT
ASLLI NATIY REGGE				
3000 036° 3000 3000				
GP 3.00° TCH 55				
4.2 NM 3.1 NM 3.1 NM 4.1 NM				
CATEGORY	A	B	C	D
RNP 0.15 DA		970/26	325 (400-½)	
RNP 0.30 DA		1058/40	413 (500-¾)	
AUTHORIZATION REQUIRED				
TDZL/RCLS Rwy 3R, 4L, 4R and 22R REIL Rwy 3L, 9L, 9R and 21R HIRL all Rwy				