

LOC I-ELM 109.1	APP CRS 242°	Rwy Ldg 7799 TDZE 955 Apt Elev 955
---------------------------	------------------------	---

ILS or LOC RWY 24
ELMIRA/CORNING RGNL (ELM)

RADAR required to define ERINN. RNAV 1-GPS required from MAP to UNOLY.
RNAV-1 GPS required for procedure entry. ADF or RADAR required.

T Circling NA for Cat D south of Rwy 10 and 28. Inop table does not apply to
A S-LOC 24 Cats C/D. Circling NA to Rwy 5 and 23. Circling Rwy 10 NA at night.
0100 For inop ALS increase S-SLS 24 all Cats visibility to RVR 6000.

 -21°C


** S-ILS 24 RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH:
Climb to 4000 direct
UNOLY/RADAR and hold.
**Missed approach
requires minimum
climb of 260 feet
per NM to 2400.

ATIS 125.475	ELMIRA APP CON★ 128.425 257.8	ELMIRA TOWER ★ 121.1 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

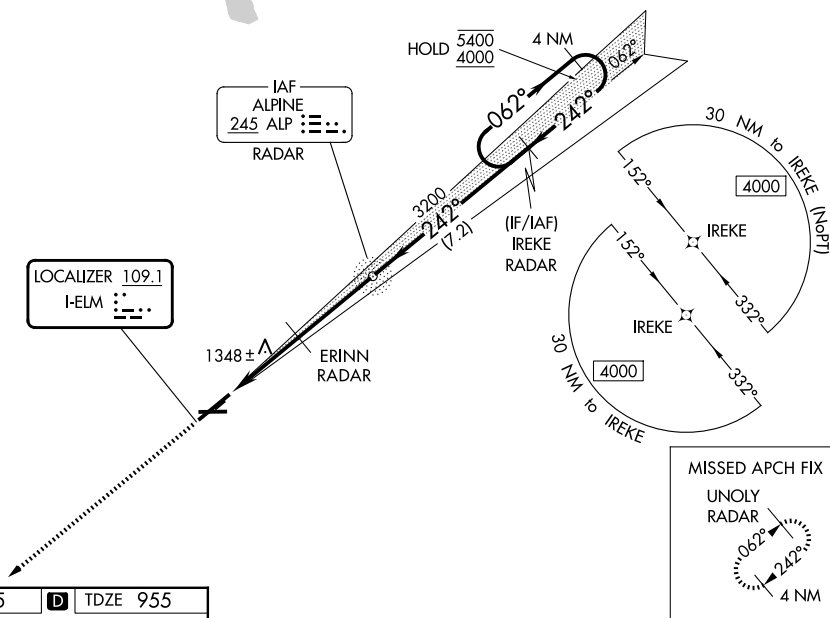

ELEV 955 **D** TDZE 955

TWR ☆

10

5404 X 150

2016 X 150

8001 X 150

28

242°

HIRL Rwy 6-24 **L**

MIRL Rwy 10-28 **L**

FAF to MAP 6.8 NM					
Knots	60	90	120	150	180
Min:Sec	6:48	4:32	3:24	2:43	2:16

4000
↑
UNOLY RADAR

* LOC only.

ERINN RADAR

ALP NDB RADAR

IREKE RADAR

4 NM Holding Pattern

062° → 5400
← 242° 4000

3158

242°

2060*

3200

GS 3.00°
TCH 53

3.3 NM 3.5 NM 7.2 NM

CATEGORY	A	B	C	D
S-ILS 24 **	1155/24 200 (200-½)			
S-ILS 24	1340/35 385 (400-¾)			
S-LOC 24	2060/40 1105 (1200-¾)	2060/55 1105 (1200-1)	2060-3	1105 (1200-3)
CIRCLING	2060-1¼ 1105 (1200-1¼)	2080-1½ 1125 (1200-½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)
ERINN FIX MINIMUMS				
S-LOC 24	1600/24	645 (700-½)	1600-1⅝	645 (700-1⅝)
CIRCLING	2020-1¼ 1065 (1100-1¼)	2080-1½ 1125 (1200-½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)