


WAAS CH 42827 W06A	APP CRS 062°	Rwy Ldg TDZE Apt Elev	7401 944 955
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6
ELMIRA/CORNING RGNL (ELM)

RNP APCH.		
▼ ⚠ ❄ -21°C Inop table does not apply to LNAV/VNAV all Cats. Circling Rwy 10 NA at night. Circling NA to Rwys 5 and 23. Circling NA for Cat D south of Rwys 10 and 28. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. # RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR	MISSED APPROACH: Climb to 4000 direct IREKE and hold.

ATIS 125.475	ELMIRA APP CON★ 128.425 257.8	ELMIRA TOWER★ 121.1 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
------------------------	---	--	-------------------------	-------------------------

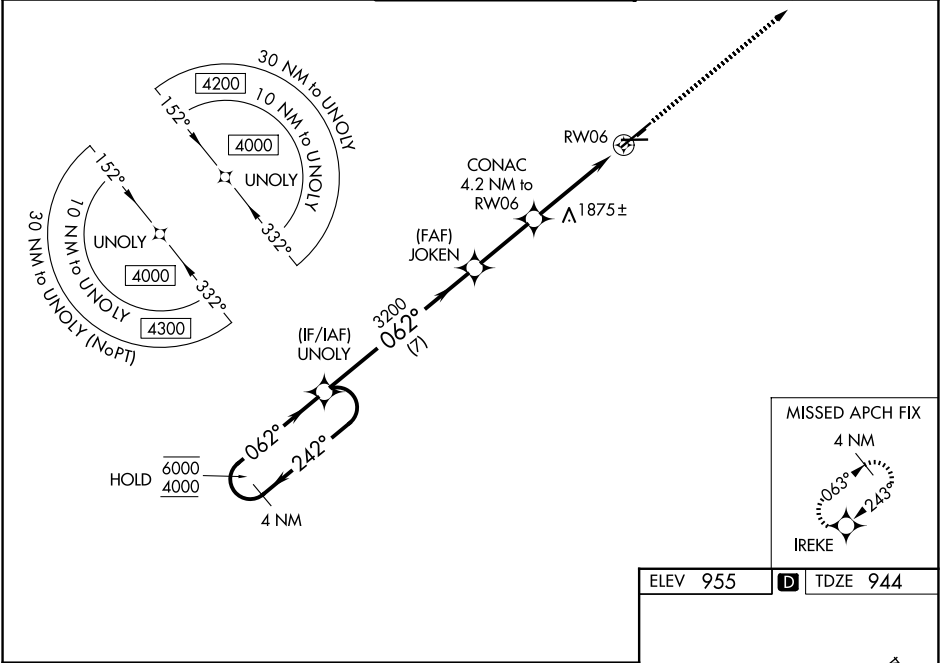

4 NM Holding Pattern		UNOLY	JOKEN	CONAC 4.2 NM to RW06	IREKE
6000 ← 242°		062° →	3200	* 2320	* INAV only
GP 3.00° TCH 52		7 NM	2.8 NM	1.2 NM	3 NM
CATEGORY	A	B	C	D	
LPV DA#	1144/24		200 (200-½)		
LNAV/VNAV DA	2138-5		1194 (1200-5)		
LNAV MDA	1940/40 996 (1000-¾)	1940/55 996 (1000-1)	1940-2½	996 (1000-2½)	
CIRCLING	2020-1¼ 1065 (1100-1¼)	2080-1½ 1125 (1200-1½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)	

