ILS or LOC RWY 5

FORT WAYNE INTL (FWA)

LOC I-HVD	APP CRS	Rwy Ldg	11981
111.9	050°	TDZE	815
		Apt Elev	815

DME required. RADAR required for procedure entry at CHMLY.


ASR


For inop ALS, increase S-ILS 5 Cat E visibility to RVR 4000, and S-LOC 5 Cats C/ D/E visibility to 1⅜ SM.

ALSF-2


MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 on FWA R-134 to OSBER/FWA 22 DME and hold.

ATIS	FORT WAYNE APP CON	FORT WAYNE TOWER	GND CON
121.25 360.825	127.2 284.6	119.1 269.325	121.9 348.6

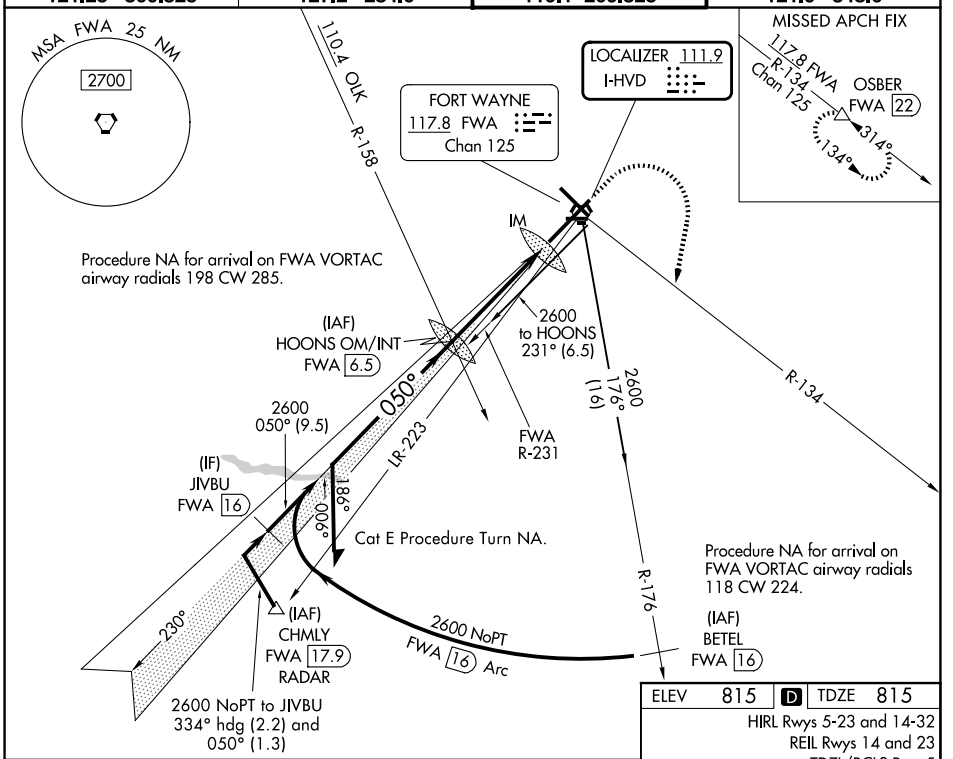

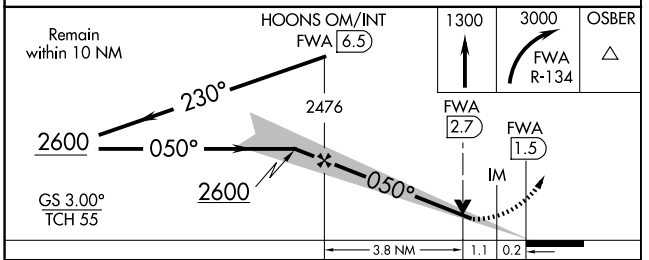

CATEGORY	A	B	C	D	E
S-ILS 5	1015/18 200 (200-½)				
S-LOC 5	1300/24 485 (500-½)		1300/50 485 (500-1)		
CIRCLING	1300-1 485 (500-1)		1360-1½ 545 (600-1½)	1520-2¼ 705 (800-2¼)	1520-2½ 705 (800-2½)

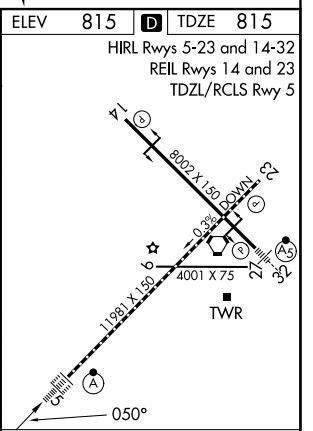

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

EC-2, 01 OCT 2026 to 29 OCT 2026
EC-2, 01 OCT 2026 to 29 OCT 2026