

WAAS
CH **77638**
W31A

APP CRS
313°

Rwy Ldg **2821**
TDZE **836**
Apt Elev **836**

RNAV (GPS) RWY 31
SMITH FLD (SMD)

▼


NA

❄️ -21°C

Rwy 31 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA.
Procedure NA at night. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all MDA 40 feet, LP Cat C visibility ¼ SM and LNAV Cat C visibility ½ SM.

MISSED APPROACH: Climb to 2700 direct GRUSS and on track 273° to WERBU and hold.

AWOS-3 124.55	FORT WAYNE APP CON 127.2 284.6	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

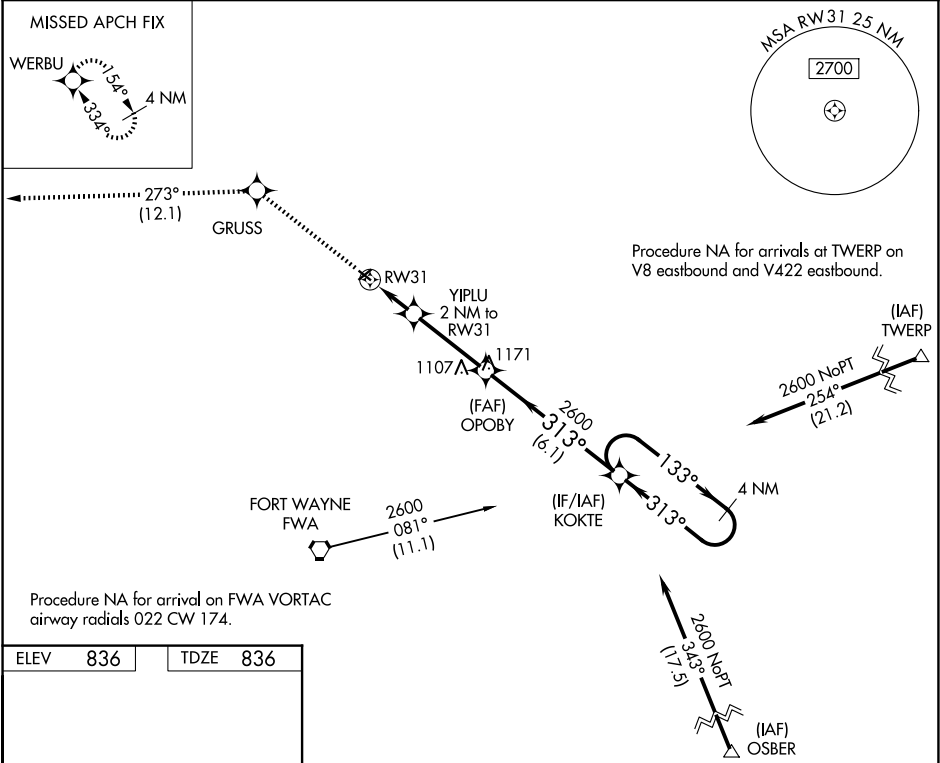

ELEV 836 TDZE 836

	2700	GRUSS	tr 273°	WERBU	Visual Segment - Obstacles.		4 NM
					OPOBY	KOKTE	Holding Pattern
				YIPLU 2 NM to RW31	313°	133°	2600
					2600	313°	
					2 NM	3.3 NM	6.1 NM
CATEGORY	A	B	C	D			
LP MDA	1240-1	404 (500-1)	1240-1 1/8 404 (500-1 1/8)	NA			
LNAV MDA	1260-1	424 (500-1)	1260-1 1/4 424 (500-1 1/4)	NA			
CIRCLING	1400-1	564 (600-1)	1940-3 1104 (1200-3)	NA			