

LOC/DME I-SXH 108.95 Chan 26 (Y)	APP CRS 093°	Rwy Ldg 10540 TDZE 669 Apt Elev 680
--	------------------------	--

ILS or LOC RWY 10C
CHICAGO O'HARE INTL (ORD)

From GIBNS: RNAV-1 GPS required.

RNAV 1-GPS or RADAR required for procedure entry. DME or RADAR required.








T Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 4000 on heading 093° and CGT VORTAC R-336 to CGT VORTAC and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON (TWR NORTH)	(TWR CENTER)
135.4 282.225	119.0 292.125	120.75 348.0	124.125 (TWR NORTH)	121.75 (CBND)
			118.05 (TWR SOUTH)	121.9 (IBND)
			226.675 (ALL TWRS)	

ALTERNATE MISSED
APCH FIX

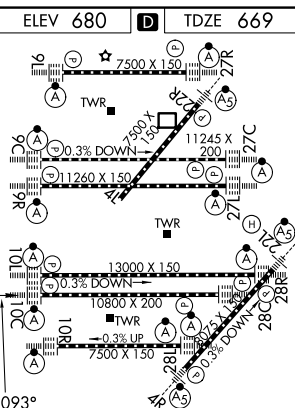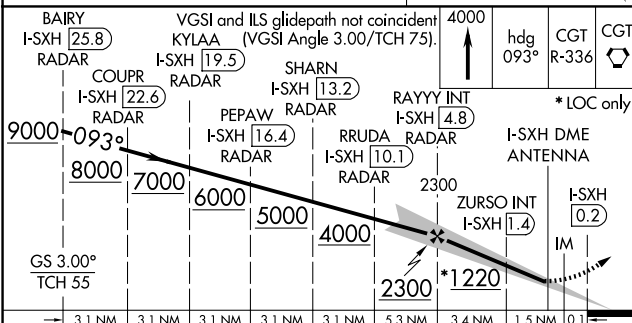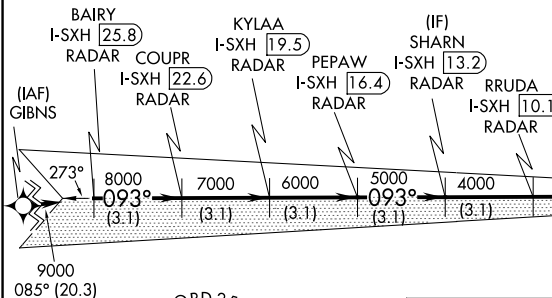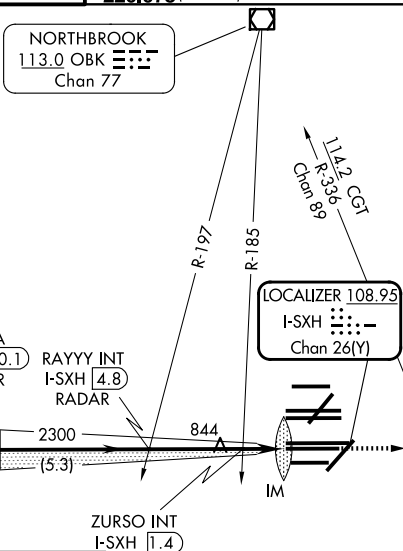

CATEGORY	A	B	C	D	HIRL all rws					
S-ILS 10C	869/18		200 (200-½)		TDZL/RCLS all rws except 4L					
S-LOC 10C	1220/24	551 (600-½)	1220/60	551 (600-1¼)	FAF to MAP 5 NM					
ZURSO FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)					Knots	60	90	120	150	180
S-LOC 10C	1100/24	431 (500-½)	1100/40	431 (500-¾)	Min:Sec	5:00	3:20	2:30	2:00	1:40