


WAAS CH 81934 W10B	APP CRS 093°	Rwy Ldg 10540 TDZE 669 Apt Elev 680
--	------------------------	--

RNAV (GPS) RWY 10C

CHICAGO O'HARE INTL (ORD)

RNP APCH - GPS.			ALSIF-2	MISSED APPROACH: Climb to 4000 direct AGZED and on track 161° to CGT VORTAC and hold.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Rwy 10C helicopter visibility reduction below RVR 4000 NA.				
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 120.75 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)

RADAR REQUIRED

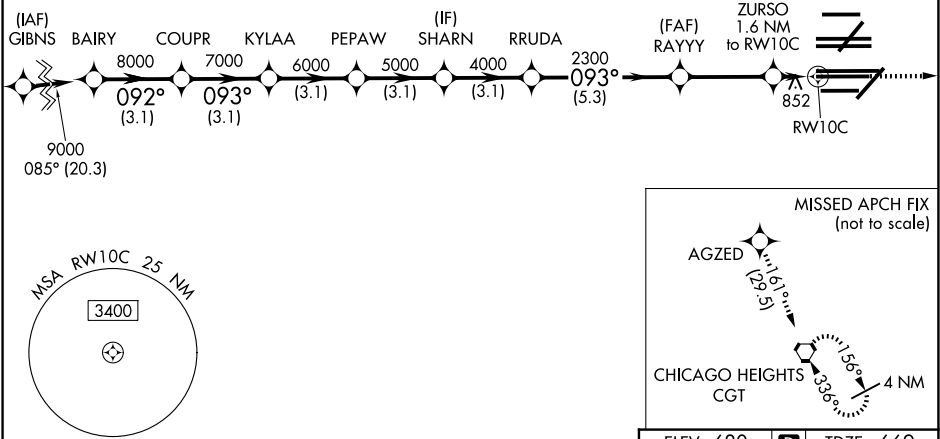

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).					4000	AGZED	tr 161°	CGT
BAIRY	COUPR	KYLAA	PEPAW	SHARN	RRUDA	RAYYY	ZURSO	RW10C
9000	8000	7000	6000	5000	4000	2300	1.6 NM to RW10C	
GP 3.00° TCH 55					2300	1220		
	3.1 NM	3.1 NM	3.1 NM	3.1 NM	3.1 NM	5.3 NM	3.4 NM	1.6 NM
CATEGORY	A		B		C		D	
LPV DA	869/18		200 (200-½)					
LNAV/VNAV DA	1062/40		393 (400-¾)					
LNAV MDA	1120/24 451 (500-½)		1120/45 451 (500-¾)					

