RNAV (GPS) RWY 22L

CHICAGO O'HARE INTL (ORD)


WAAS	APP CRS	Rwy Ldg	8075
CH 50228	225°	TDZE	654
W22B		Apt Elev	680

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 22R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct CGT VORTAC and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	120.75 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)

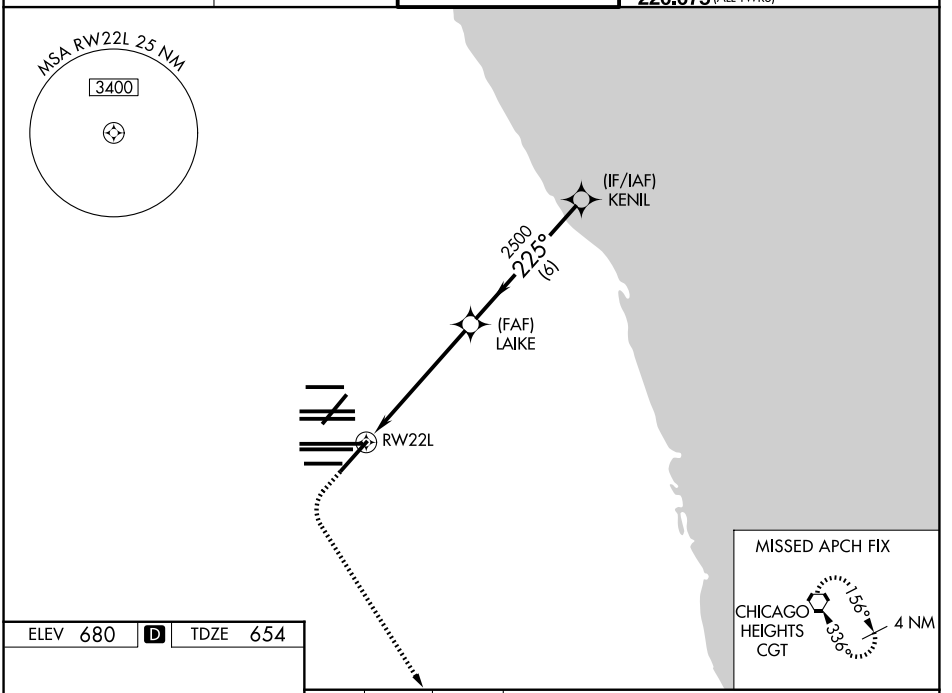


ELEV 680 | D | TDZE 654

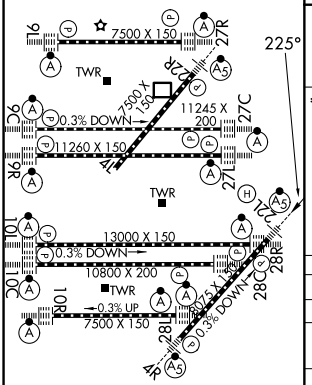

HIRL all rwys
TDZL/RCLS all rwys except 4L

1100	4000	CGT

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).

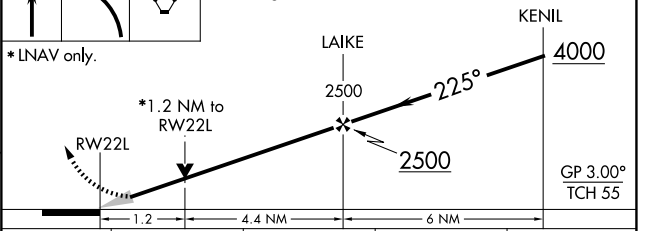

CATEGORY	A	B	C	D
LPV DA	854/18 200 (200-½)			
LNAV/VNAV DA	1066/45 412 (400-⅞)			
LNAV MDA	1120/24 466 (500-½)		1120/50 466 (500-1)	
CIRCLING	1220-1 540 (600-1)		1220-1½ 540 (600-1½)	1460-2½ 780 (800-2½)

EC-3, 01 OCT 2026 to 29 OCT 2026
EC-3, 01 OCT 2026 to 29 OCT 2026