WAAS CH 42804 W28A | APP CRS 273° | Rwy Ldg 13000 TDZE 651 Apt Elev 680

RNAV (GPS) RWY 28R

CHICAGO O'HARE INTL (ORD)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C/D visibility to RVR 6000. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


ALSF-2

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct DPA VOR/DME and hold.


D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	132.7 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)

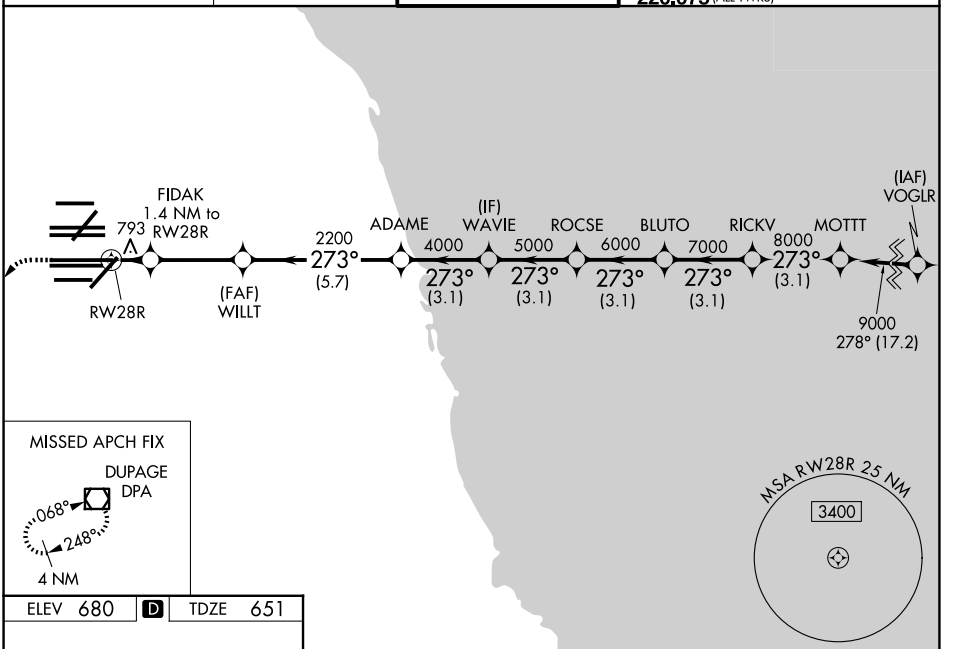

ELEV 680 | D | TDZE 651

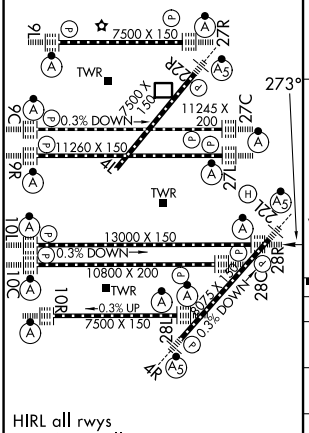

HIRL all rwys
TDZL/RCLS all rwys except 4L

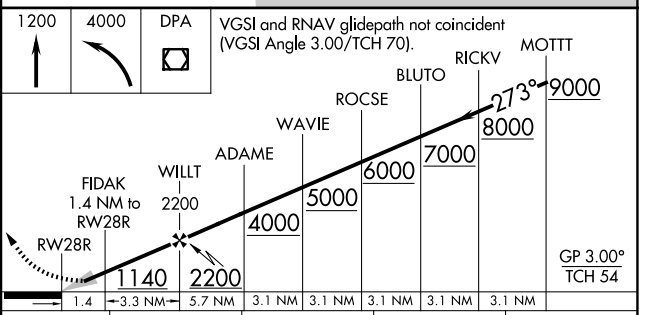

CATEGORY	A	B	C	D
LPV DA	851/18 200 (200-½)			
LNAV/VNAV DA	1058/40 407 (400-¾)			
LNAV MDA	1060/24 409 (400-½)		1060/40 409 (400-¾)	

EC-3, 01 OCT 2026 to 29 OCT 2026
EC-3, 01 OCT 2026 to 29 OCT 2026