


APP CRS	Rwy Ldg	9000
271°	TDZE	3852
	Apt Elev	3877

RNAV (RNP) Y RWY 27
HELENA RGNL (HLN)

RNP AR APCH - GPS.		
 For uncompensated Baro-VNAV systems, procedure NA below -28°C or above 54°C.  -16°C Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30 DA* visibility all Cats to 1½ SM.	MALSR 	MISSED APPROACH: Climb to 12000 on the RNAV missed approach route to PIX1 and hold, continue climb-in-hold to 12000. *Missed approach requires minimum climb of 260 feet per NM to 7900; if unable to meet climb gradient, see RNAV (RNP) Z RWY 27.

ATIS 120.4	HELENA APP CON ★ 119.5 229.4	HELENA TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

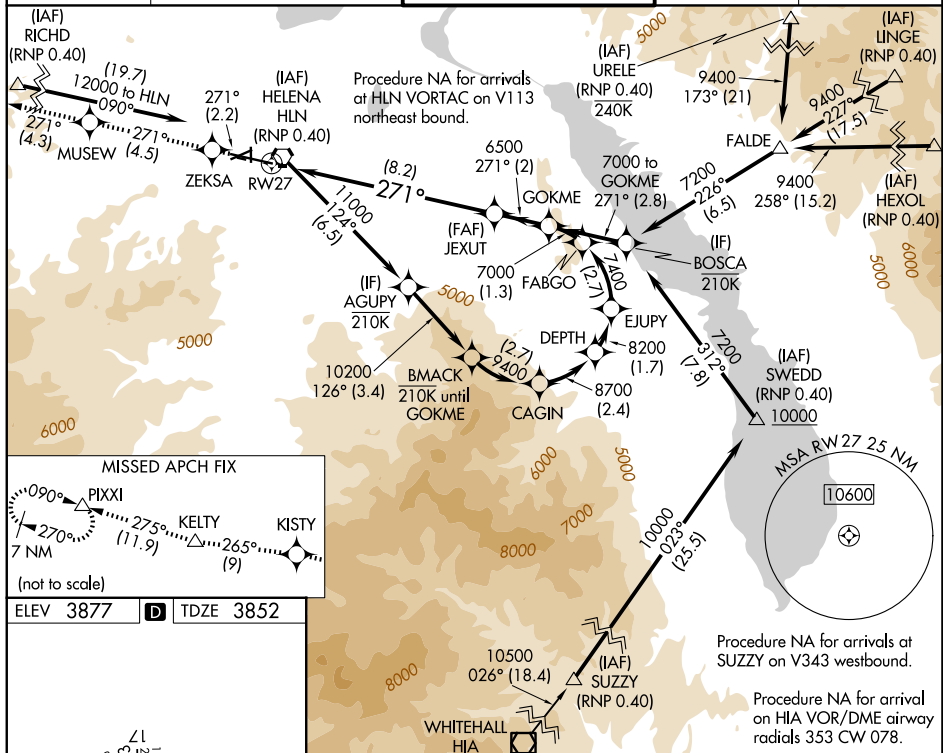

See planview for multiple IF locations.

12000	ZEKSA	tr 271°	MUSEW	tr 271°	KISTY	tr 265°	KELTY	tr 275°	PIXXI	GOKME
tr 271°										

JEXUT

6500

271°

7000

GP 3.00°

TCH 55

8.2 NM

2 NM

CATEGORY	A	B	C	D
RNP 0.15 DA*		4284-3/4	432 (500-3/4)	
RNP 0.30 DA*		4321-1	469 (500-1)	

AUTHORIZATION REQUIRED