

WAAS CH 70310 W13A	APP CRS 131°	Rwy Ldg 6568 TDZE 46 Apt Elev 46
--	------------------------	---

RNAV (GPS) RWY 13R

WILLIAM P HOBBY (HOU)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to RVR 5000; increase LNAV/VNAV Cats A/B/C/D visibility to 1½ SM, Cat E to 1½ SM; and increase LNAV Cats A/B visibility to RVR 5500, Cats C/D to 1½ SM, Cat E to 1¾ SM. Rwy 13R helicopter visibility reduction below ¾ SM NA.

MALSR




MISSED APPROACH: Climb to 2200 direct LESLO and on track 134° to VUH VOR/DME.

D-ATIS 124.6	HOUSTON APP CON 120.05 379.1 (E) 124.35 316.15 (W)	HOBBY TOWER 118.7 256.9	GND CON 121.9
------------------------	--	-----------------------------------	-------------------------

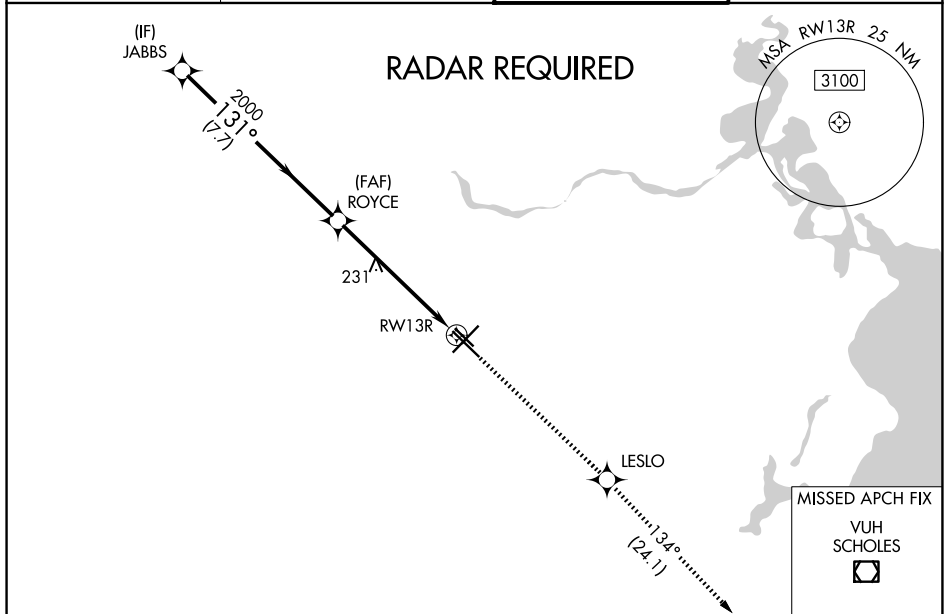

JABBS 2000 GP 3.00° TCH 49°		ROYCE 2000		2200 LESLO tr 134° VUH	
131° 2000		7.7 NM		4.5 NM	
1.4 NM to RW13R		1.4 NM		RW13R	
*LNAV only					
CATEGORY	A	B	C	D	E
LPV DA	330/40		284 (300-¾)		
LNAV/ VNAV	475/50		429 (500-1)		
LNAV MDA	540/40	494 (500-¾)	540/50	494 (500-1)	540/60 494 (500-1¼)
CIRCLING	540-1	494 (500-1)	740-2¼	694 (700-2¼)	860-3 814 (900-3)

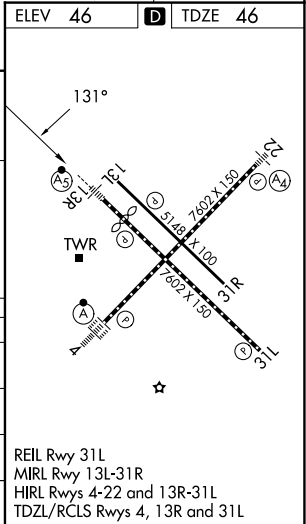

RNAV (GPS) RWY 13R