RNAV (RNP) Z RWY 23R

INDIANAPOLIS INTL (IND)

APP CRS	Rwy Ldg	11200
230°	TDZE	783
	Apt Elev	796

For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS Required. For inoperative ALS, increase RNP 0.15 all Cats visibility to RVR 6000 and increase RNP 0.30 all Cats visibility to 1⅜ SM. Simultaneous approach authorized.

MALSR


MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct KEADY and hold.


D-ATIS	INDIANAPOLIS APP CON	INDY TOWER	GND CON	CLNC DEL	CPDLC
134.25	128.175 317.8	120.9 251.1	121.9	128.75 251.1	

RADAR required for arrivals at TRAAK.


RADAR required for arrivals at PEYTN.

RADAR required for arrivals at MIILR.

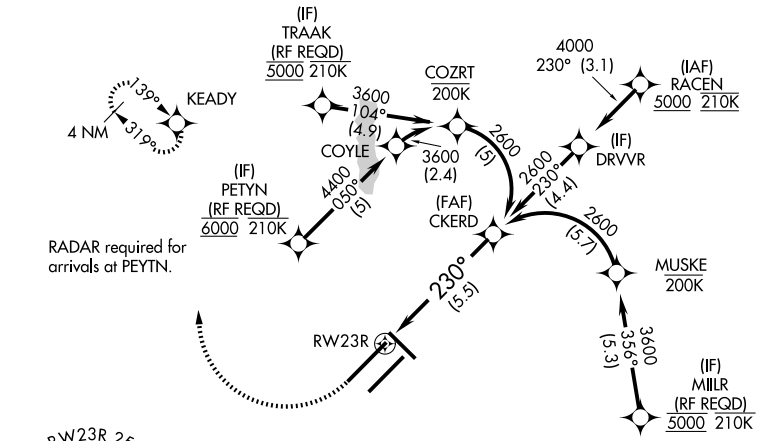




ELEV 796	D	TDZE 783



1200	3000	KEADY

See planview for multiple IF locations.

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

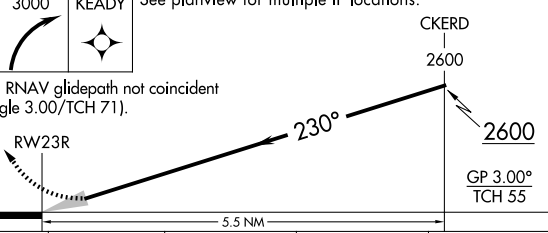

CATEGORY	A	B	C	D
RNP 0.15 DA	1147/40	364 (400-¾)		
RNP 0.30 DA	1206/50	423 (500-1)		

AUTHORIZATION REQUIRED

HIRL all Rwys
TDZ/CL Rwys 5L and 5R

EC-2, 01 OCT 2026 to 29 OCT 2026
EC-2, 01 OCT 2026 to 29 OCT 2026