


ILS or LOC RWY 19
KANSAS CITY DOWNTOWN/WHEELER FLD (MKC)

MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 direct TOP VORTAC and hold.

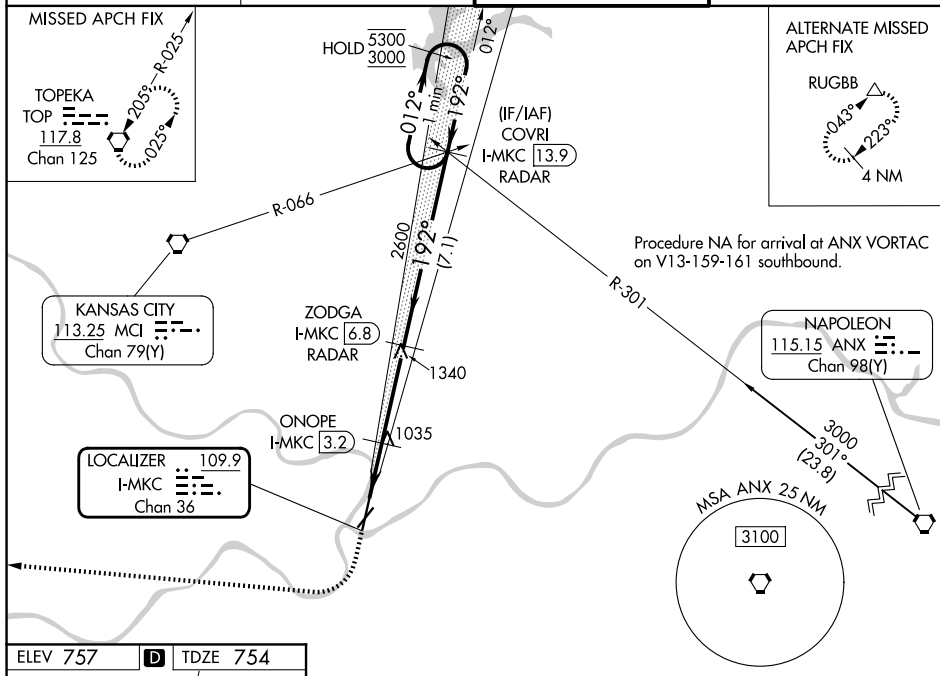

The diagram illustrates the ZODIA radar system's capabilities. It shows a top-down view of the radar antenna at the top, with a scale from 1300 to 4000 units. The radar can operate in several modes: I-MKC (Intercept Mode - Kill Chain) with ranges of 1.1 NM, 2.7 NM, and 3.2 NM; ONOPE (One Minute Holding Pattern) with a range of 3.6 NM; ZODGA (ZODIA Radar) with a range of 6.8 NM; and COVRI (Coverage) with a range of 13.9 NM. A One Minute Holding Pattern is shown as a curved arrow. The radar also displays a target at 2600 units, with a bearing of 192° and a distance of 1460 units. The ground speed (GS) is 3.00° and the track height (TCH) is 46.

CATEGORY	A	B	C	D
S-ILS 19		1004/40	250 (300-¾)	
S-LOC 19	1460/40 706 (800-¾)	1460/55 706 (800-1)	1460-1⅞	706 (800-1⅞)
CIRCLING	1460-1	703 (800-1)	1460-2 703 (800-2)	1540-2½ 783 (800-2½)
	ONOPE FIX MINIMUMS			
S-LOC 19	1300/40	546 (600-¾)	1300-1⅓	546 (600-1⅓)
CIRCLING	1380-1 623 (700-1)	1400-1 643 (700-1)	1460-2 703 (800-2)	1540-2½ 783 (800-2½)