


LOC/DME I-GQR	APP CRS	Rwy Ldg	4270
111.75	035°	TDZE	744
Chan 54 (Y)		Apt Elev	757

ILS or LOC RWY 4

KANSAS CITY DOWNTOWN/WHEELER FLD (MKC)

DME or RADAR required for procedure entry. DME or RADAR required for LOC only.	MISSED APPROACH: Climb to 3100 then right turn heading 100° and on ANX VORTAC R-295 to ANX VORTAC and hold.
⚠ Circling NA east of Rwy 1-19. Autopilot coupled approach NA below 1013. ⚠ Circling NA to Rwy 22. Circling NA for Cat D to Rwy 4. Rwy 4 helicopter visibility reduction below RVR 4000 NA.	

ATIS 120.75	KANSAS CITY APP CON 118.4 307.35	DOWNTOWN TOWER 133.3 233.7	GND CON 121.9
-----------------------	--	--------------------------------------	-------------------------

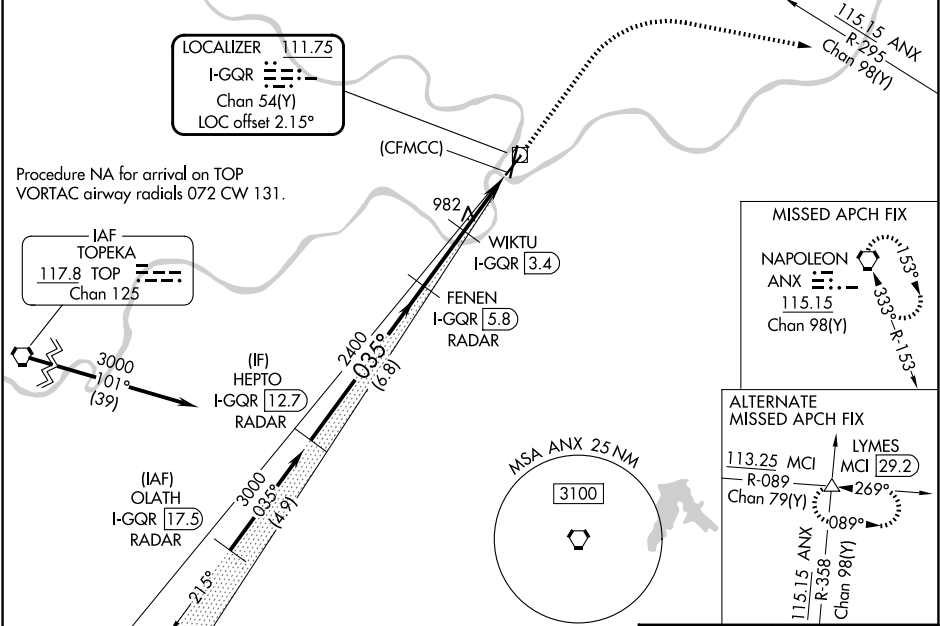

HEPTO I-GQR 12.7 RADAR 3000 GS 3.00° TCH 52				FENEN I-GQR 5.8 RADAR 2400				WIKTU I-GQR 3.4 1560				I-GQR 2.2 (CFMCC) I-GQR 0.8				3100 ↑ hdg 100°		ANX R-295 ⬡									
035°				2400				1560				6.8 NM				2.4 NM				1.2 NM				1.4 NM			
CATEGORY		A		B		C		D																			
S-ILS 4		1001/40 257 (300-¾)														NA											
S-LOC 4		1560/55 816 (900-1)				1560-1¼ 816 (900-1¼)				1560-2½ 816 (900-2½)				NA													
CIRCLING		1560-1 803 (900-1)				1560-1¼ 803 (900-1¼)				1560-2½ 803 (900-2½)																	
WIKTU FIX MINIMUMS																											
S-LOC 4		1240/55				496 (500-1)				1240-1⅜ 496 (500-1⅜)				NA													
CIRCLING		1380-1 623 (700-1)				1400-1 643 (700-1)				1460-2 703 (800-2)				1540-2½ 783 (800-2½)													

