


WAAS CH 50413 W24A	APP CRS 238°	Rwy Ldg TDZE Apt Elev	5002 857 861
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24

CAPITAL REGION INTL (LAN)

RNP APCH.	MISSED APPROACH: Climb to 3000 direct EGUTY and hold.
Circling Rwy 10L, 28R NA at night. Rwy 24 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.	

ATIS 119.75	GREAT LAKES APP CON ★ 118.65 226.4	LANSING TOWER 119.9 240.9	GND CON 121.9
-----------------------	--	-------------------------------------	-------------------------

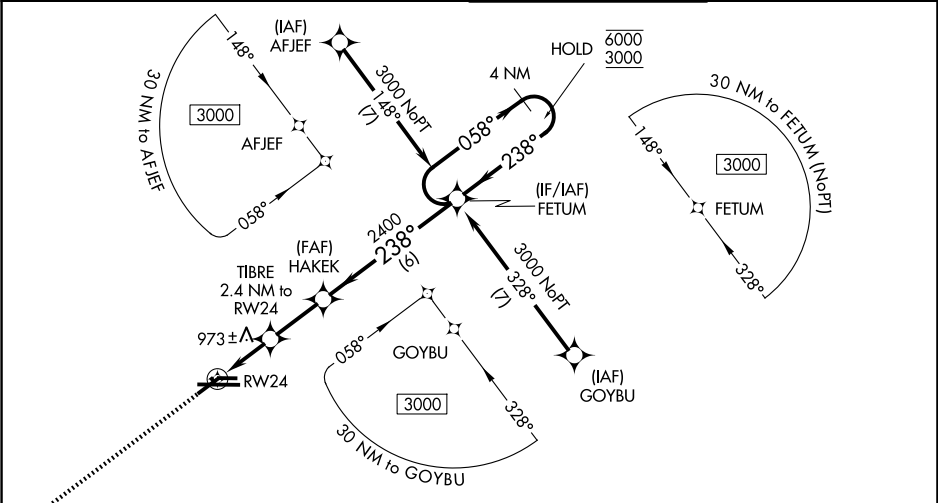

ELEV 861	D	TDZE 857
MISSED APCH FIX EGUTY 058° 238° 4 NM		

Inset chart showing RWY 24 and surrounding terrain. Key features include: 3601 X 75, 8506 X 150, 28L, 28R, 10R, 10L, 5003 X 120, TWR, and a 238° heading.	3000	EGUTY	4 NM	FETUM	4 NM	Holding Pattern
	* LNAV only					
	* 1.1 NM to RWY 24					
	* 1640					
	GP 3.00° TCH 42					
CATEGORY	A	B	C	D		
LPV DA	1162-7/8		305 (400-7/8)			
LNAV/VNAV DA	1286-1¼		429 (500-1¼)			
LNAV MDA	1240-1 383 (400-1)		1240-1½ 383 (400-1½)			
CIRCLING	1320-1 459 (500-1)	1380-1 519 (600-1)	1600-2 739 (800-2)	1760-3 899 (900-3)		