RNAV (RNP) Z RWY 17R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

APP CRS	Rwy Ldg	10000
170°	TDZE	485
	Apt Elev	501


RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. Simultaneous approach authorized.
For inop ALS, increase RNP 0.30 visibility all Cats to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 direct DAMEN and hold.


D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON
118.725	132.075 327.0	124.2 257.8	121.7 348.6

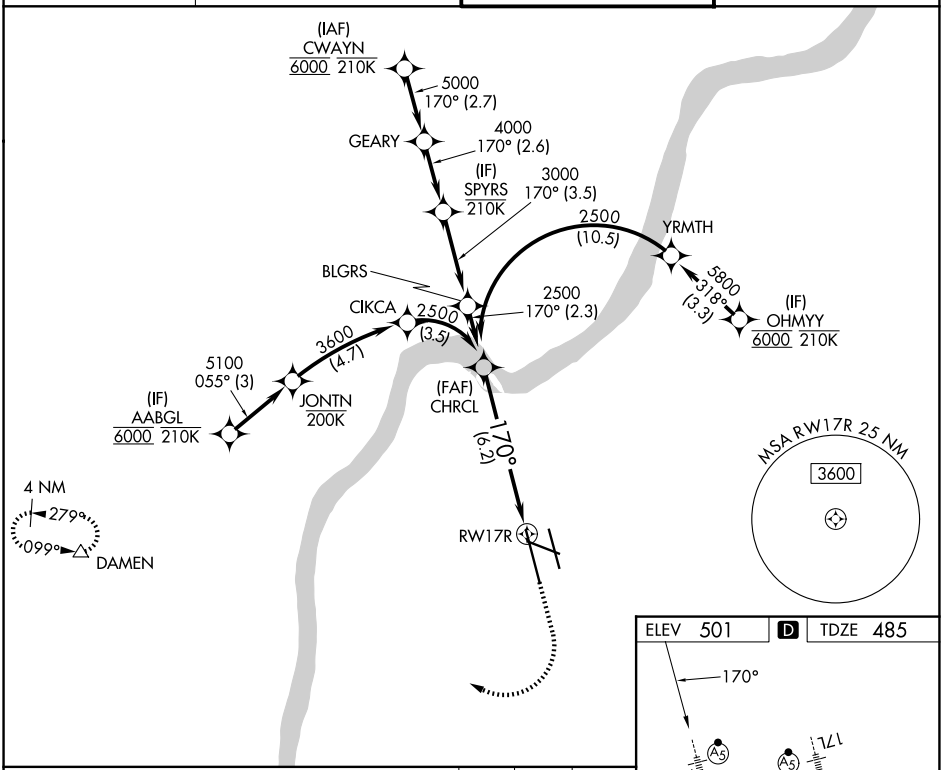

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 64).


1600	4000	DAMEN
↑	↷	△

See planview for multiple IF locations.

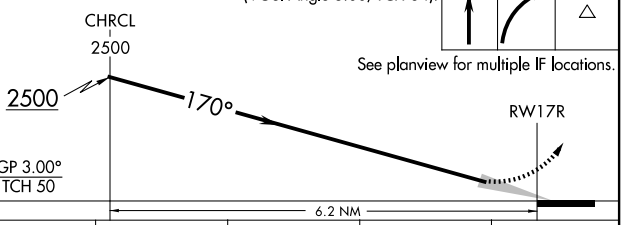

CATEGORY	A	B	C	D
RNP 0.30 DA	974/50	489 (500-1)		

AUTHORIZATION REQUIRED

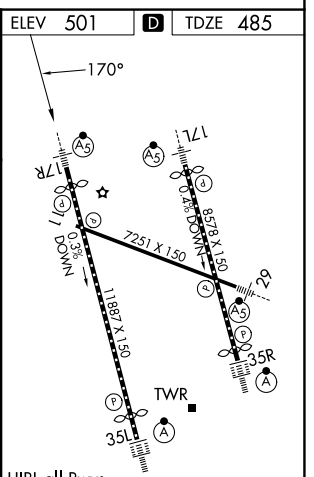

HIRL all Rwys
TDZL/RCLS Rwys 17L, 17R, 35L and 35R

SE-1, 01 OCT 2026 to 29 OCT 2026
SE-1, 01 OCT 2026 to 29 OCT 2026