
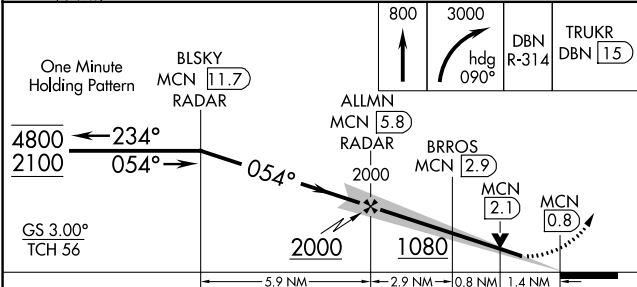


LOC I-MCN 109.5	APP CRS 054°	Rwy Ldg TDZE Apt Elev 6221 344 354	ILS or LOC RWY 5 MIDDLE GEORGIA RGNL (MCN)	
---------------------------	------------------------	--	---	--

DME and RADAR required.		MALSR 	MISSED APPROACH: Climb to 800 then climbing right turn to 3000 on heading 090° and DBN VORTAC R-314 to TRUKR/DBN VORTAC 15 DME/RADAR and hold.
DME from MCN VORTAC. Simultaneous reception of I-MCN and MCN DME required. For inop ALS, increase S-ILS 5 Cat E visibility to RVR 4000 and S-LOC 5 Cats C, D, and E visibilities to 1 3/8 SM. * RVR 1800 authorized with use of FD or AP or HUD to DA.			

ATIS 120.775	ATLANTA APP CON ★ 124.2 279.6	MACON TOWER ★ 128.2 (CTAF) 0 257.8	GND CON 121.65	UNICOM 122.95
------------------------	---	--	--------------------------	-------------------------

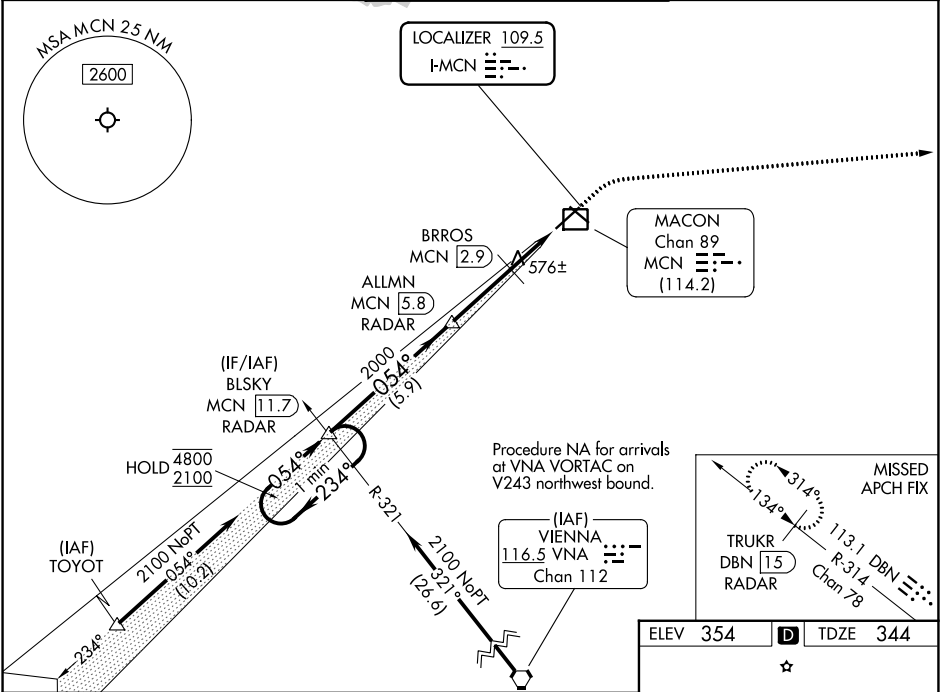

CATEGORY	A	B	C	D	E
S-ILS 5*	544/24 200 (200-1/2)				
S-LOC 5	840/24	496 (500-1/2)	840/50	496 (500-1)	
CIRCLING	900-1	546 (600-1)	920-1 1/2 566 (600-1 1/2)	1120-2 1/2 766 (800-2 1/2)	1180-3 826 (900-3)

