
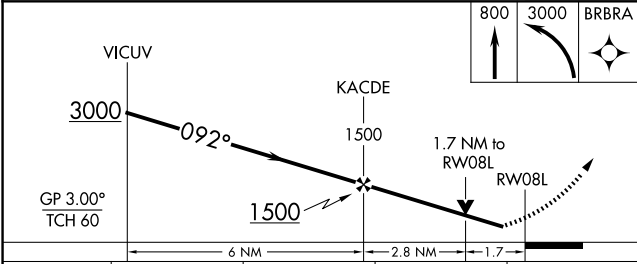


WAAS CH 42703 W08A	APP CRS 092°	Rwy Ldg 8600 TDZE 9 Apt Elev 9
--	------------------------	---

RNAV (GPS) Z RWY 8L
MIAMI INTL (MIA)

RNP APCH - GPS. ▼ Rwy 8L helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 9°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.	MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct BRBRA and hold.
--	--

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30) 348.6
-------------------------	--------------------------------------	-----------------------------------	---

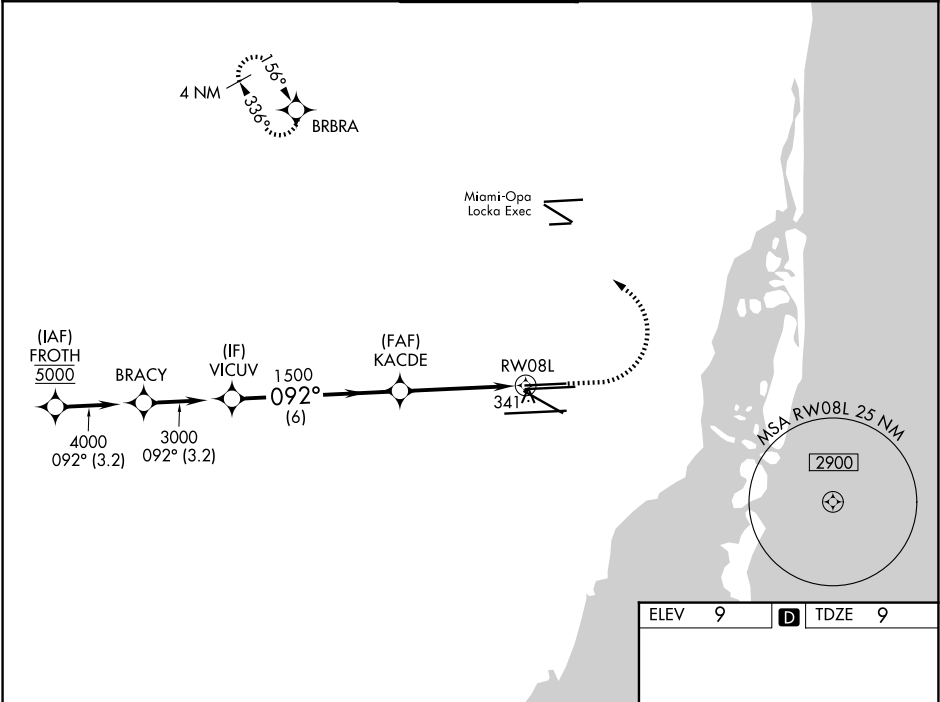

CATEGORY	A	B	C	D
LPV DA	279-7/8 270 (300-7/8)			
LNAV/VNAV DA	513-13/8 504 (600-13/8)			
LNAV MDA	600-1 591 (600-1)		600-13/4 591 (600-13/4)	

