


APP CRS	Rwy Ldg	8012
076°	TDZE	729
	Apt Elev	729

RNAV (RNP) Y RWY 7R


GENERAL MITCHELL INTL (MKE)

RF required. RNP AR APCH.	MALSR	MISSED APPROACH: Climb to 3700 on the RNAV missed approach route to PROOT and hold.
For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to 1¼. For inop ALS, increase RNP 0.15 all Cats visibility to 1½. For inop ALS, increase RNP 0.30 all Cats visibility 1¾.		

D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125
-----------------	----------------------------------	-----------------------------------	--------------------------

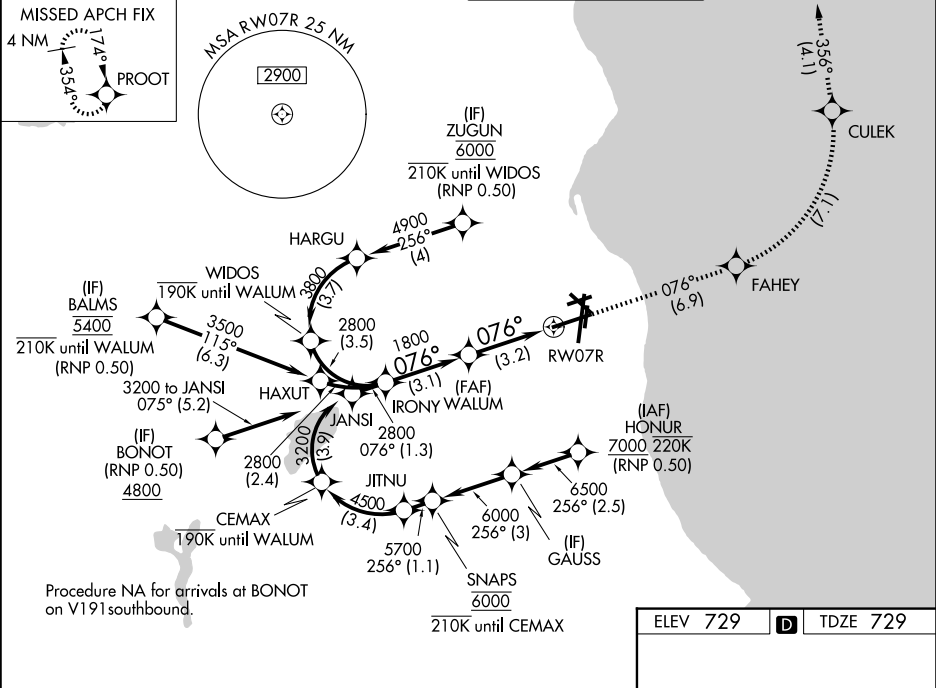

See planview for multiple IF locations.	3700	FAHEY	CULEK	tr 356°	PROOT
	tr 076°				

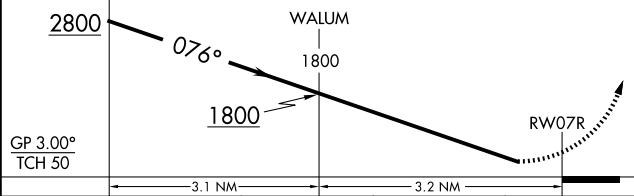

CATEGORY	A	B	C	D
RNP 0.10 DA	1119/45	390 (400-½)		
RNP 0.15 DA	1203/60	474 (500-1¼)		
RNP 0.30 DA	1255-1¾	526 (600-1½)		

AUTHORIZATION REQUIRED

