

APP CRS
350°


Rwy Ldg
TDZE
Apt Elev

8000
834
842

RNAV (RNP) Y RWY 35


MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

RNP AR APCH - GPS. Authorization required. From HANRA or CHRMR: RF.		ALSF-2	MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct LYDIA and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.11 visibility all Cats to RVR 5500 and RNP 0.30 visibility all Cats to 1 3⁄8 SM.			
D-ATIS 135.35 239.275	MINNEAPOLIS APP CON 118.725 335.65 (35) 119.3 335.65 (4-22, 12L-30R, 17) 126.95 335.65 (12R-30L)	MINNEAPOLIS TOWER 123.675 273.55 (17-35) 123.95 273.55 (12L-30R) 126.7 273.55 (4-22, 12R-30L)	GND CON 121.8 348.6 (N) 121.9 348.6 (S) 127.925 348.6 (W)

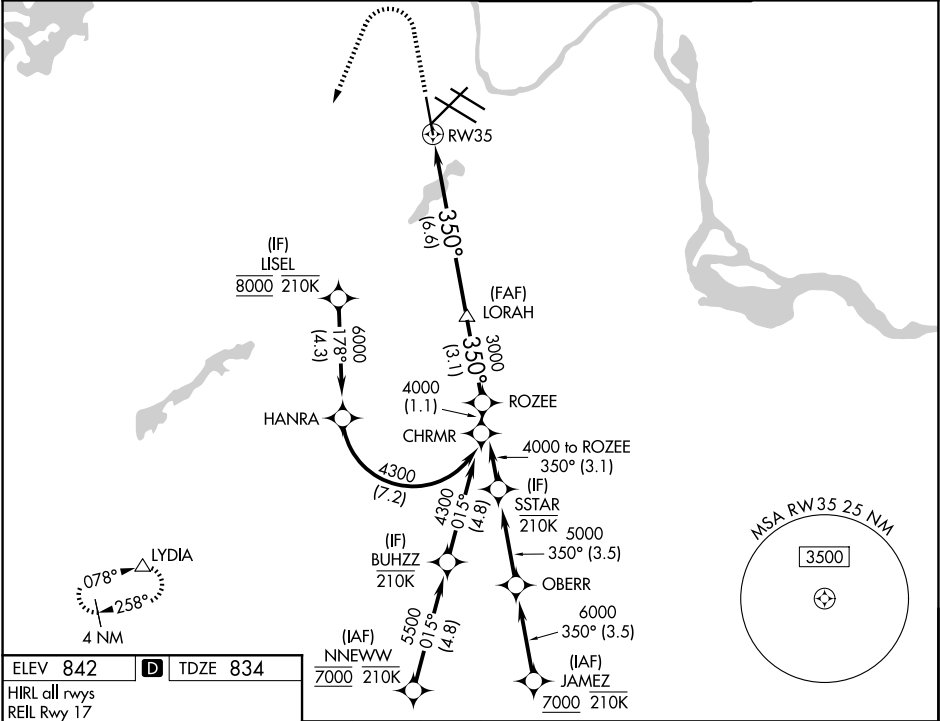

ELEV 842 D TDZE 834

HIRL all rwys
REIL Rwy 17
TDZL/RCLS Rwys 12L, 12R, 30L, and 35

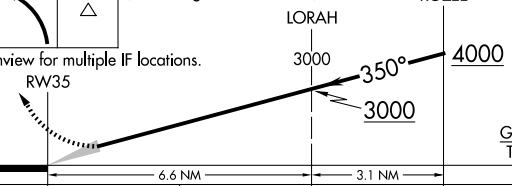1300	3000	LYDIA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).	
				
See planview for multiple IF locations.				
				
CATEGORY	A	B	C	D
RNP 0.11 DA	1213/35 379 (400-5%)			
RNP 0.16 DA	1291/45 457 (500-7%)			
RNP 0.30 DA	1345/55 511 (600-1)			
AUTHORIZATION REQUIRED				

NC-1, 01 OCT 2026 to 29 OCT 2026

NC-1, 01 OCT 2026 to 29 OCT 2026