


|           |         |          |
|-----------|---------|----------|
| LOC I-MLU | APP CRS | Rwy Ldg  |
| 109.5     | 042°    | 7504     |
|           |         | TDZE     |
|           |         | 78       |
|           |         | Apt Elev |
|           |         | 79       |

ILS or LOC RWY 4  
MONROE RGNL (MLU)

|                                                                                                                                                                                                                                                                              |                  |                     |         |                                                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------|---------|---------------------------------------------------------------------------------------------|
| ADF or DME required for procedure entry.                                                                                                                                                                                                                                     |                  |                     | MALSR   | MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold. |
| Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 4 Cat C/D visibility to 1½ SM.<br>UXGOY FIX MINIMUMS: For inop ALS, increase S-LOC 4 Cat C/D visibility to RVR 5500.<br>ASR **RVR 1800 authorized with the use of FD or AP or HUD to DA.<br># DME from MLU VORTAC. |                  |                     |         |                                                                                             |
| ATIS                                                                                                                                                                                                                                                                         | MONROE APP CON * | MONROE TOWER *      | GND CON | UNICOM                                                                                      |
| 125.05                                                                                                                                                                                                                                                                       | 118.15 290.475   | 118.9(CTAF) 0 257.8 | 121.9   | 122.95                                                                                      |

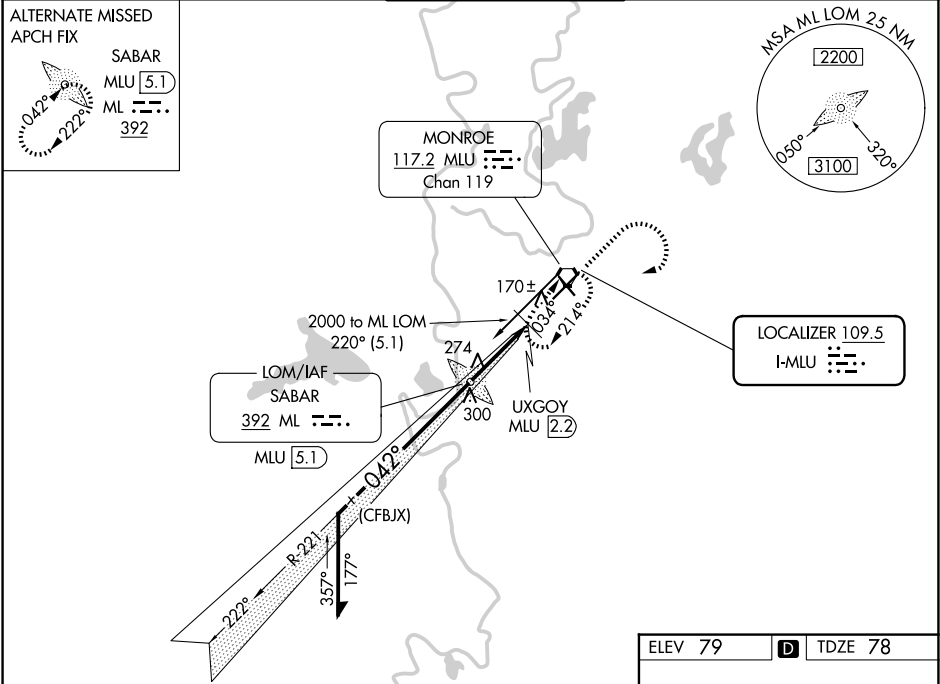

|                      |                      |                |                        |                         |     |
|----------------------|----------------------|----------------|------------------------|-------------------------|-----|
| Remain within 10 NM  |                      | ML LOM MLU 5.1 | 1800                   | 3000                    | MLU |
| 2000                 |                      | 1483           | * LOC only.            |                         |     |
| GS 3.00° TCH 50      |                      | 1500           | UXGOY MLU 2.2          | * 540                   |     |
|                      |                      | 2.9 NM         | 1.3 NM                 |                         |     |
| CATEGORY             | A                    | B              | C                      | D                       |     |
| S-ILS 4              | **278/24 200 (200-½) |                |                        |                         |     |
| S-LOC 4              | 540/24               | 462 (500-½)    | 540/50                 | 462 (500-1)             |     |
| CIRCLING             | 580-1                | 501 (600-1)    | 740-1¾<br>661(700-1¾)  | 1160-3<br>1081 (1100-3) |     |
| # UXGOY FIX MINIMUMS |                      |                |                        |                         |     |
| S-LOC 4              | 420/24               | 342 (400-½)    | 420/30                 | 342 (400-¾)             |     |
| CIRCLING             | 580-1                | 501 (600-1)    | 740-1¾<br>661 (700-1¾) | 1160-3<br>1081 (1100-3) |     |

