


WAAS CH 56410 W04A	APP CRS 042°	Rwy Ldg 7504 TDZE 78 Apt Elev 79
--	------------------------	---

RNAV (GPS) RWY 4

MONROE RGNL (MLU)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. Circling ASR Rwy 14 NA at night. ** RVR 1800 authorized with use of FD or AP or HUD to DA.			MALSR A5 MISSED APPROACH: Climb to 3000 direct LURBY and hold.	
ATIS 125.05	MONROE APP CON★ 118.15 290.475	MONROE TOWER★ 118.9 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95

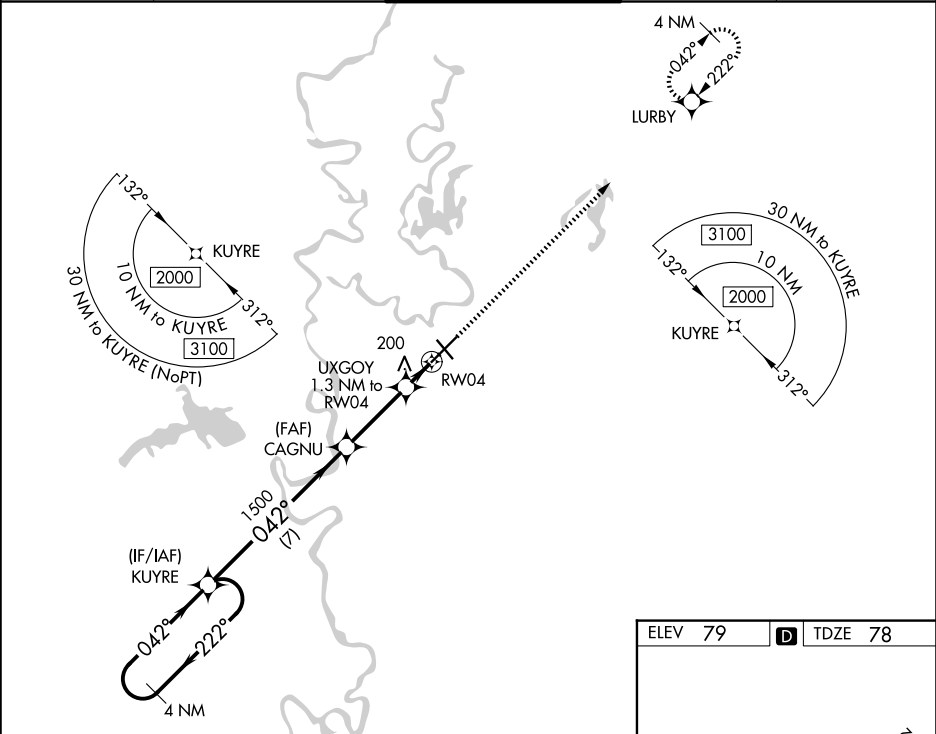

4 NM Holding Pattern					3000	LURBY
KUYRE					*LNAV only.	
2000 ← 222° / 042° →					GP 3.00° TCH 50	
CAGNU 1500					UXGOY 1.3 NM to RWY 04	
1500					RWY 04	
7 NM					*540	
CATEGORY	A	B	C	D		
LPV DA **	278/24		200 (200-½)			
LNAV/VNAV DA	383/24		305 (400-½)			
LNAV MDA	460/24 382 (400-½)		460/35 382 (400-¾)			
CIRCLING	580-1 501 (600-1)		740-1¾ 661 (700-1¾)		1160-3 1081 (1100-3)	

