

WAAS CH 40313 W01B	APP CRS 006°	Rwy Ldg 5930 TDZE 17 Apt Elev 36
--	------------------------	---

RNAV (GPS) Z RWY 1L
NAPA COUNTY (APC)

RNP APCH - GPS.



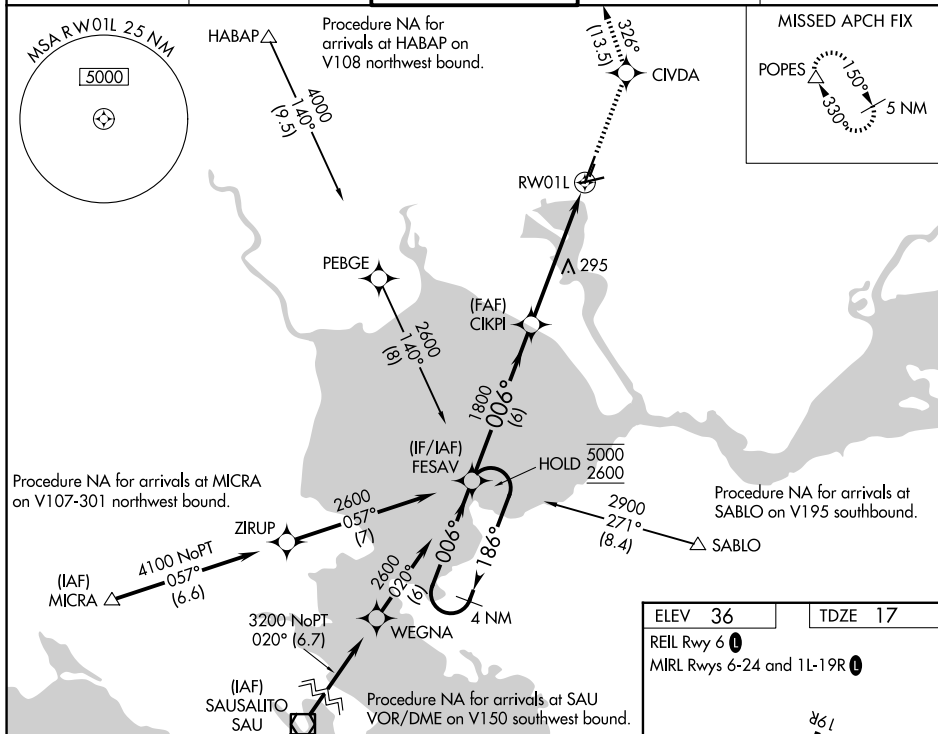
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. Inop table does not apply to LPV minimums. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM.

MALS



MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold. Missed approach requires minimum climb of 420 feet per NM to 2200; if unable to meet climb gradient, see RNAV (GPS) Y RWY 1L.

ATIS 124.05	OAKLAND CENTER 127.8 353.5	NAPA TOWER* 118.70 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
----------------	-------------------------------	------------------------------------	------------------	------------------

[illegible]