

APP CRS	Rwy Ldg	7601
021°	TDZE	587
	Apt Elev	599

RNAV (RNP) Z RWY 2C

NASHVILLE INTL (BNA)


RNP APCH - GPS. Authorization required. From SITEE, JOVEE, LNWOD, RMSEY or MIGAN: RF.

For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500, increase RNP 0.30 all Cats visibility to 1 3⁄8 SM.

MALSR

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct TANDS and hold.

D-ATIS	NASHVILLE APP CON	NASHVILLE TOWER	GND CON
135.1	118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	118.6 257.8	121.9 348.6

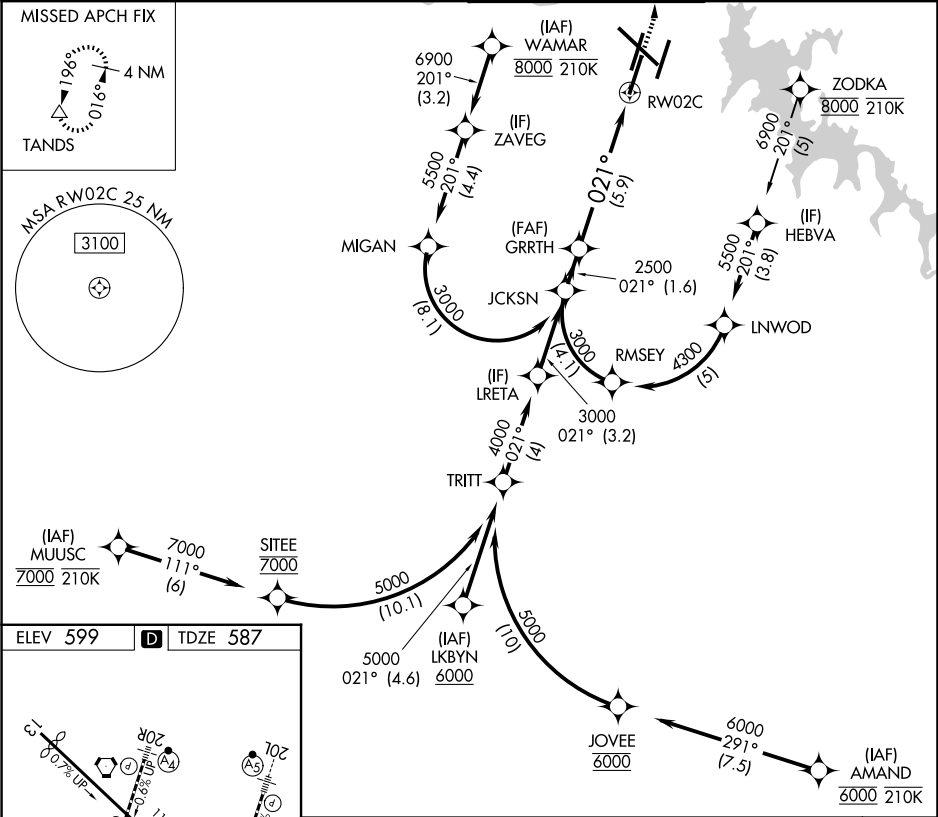

See planview for multiple IF locations.

	JCKSN	GRRTH				1300 ↑	4000 ↶	TANDS △
	3000		2500					
	GP 3.00°	021°	2500					
	TCH 60							
		1.6 NM		5.9 NM				
CATEGORY	A	B	C	D				
RNP 0.15 DA		852/24	265 (300-½)					
RNP 0.30 DA		1018/50	431 (500-1)					

AUTHORIZATION REQUIRED