RNAV (RNP) Z RWY 2R

NASHVILLE INTL (BNA)

APP CRS	Rwy Ldg	8000
021°	TDZE	590
	Apt Elev	599


RNP AR APCH - GPS. Authorization required. From WAMAR, ZODKA, MUUSC, or AMAND: RF

For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized with Rwy 2L/C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500 and RNP 0.3 all Cats visibility to 6000.

ALSF-2

MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 direct LENON and hold.

D-ATIS	NASHVILLE APP CON	NASHVILLE TOWER	GND CON
135.1	118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	118.6 257.8	121.9 348.6

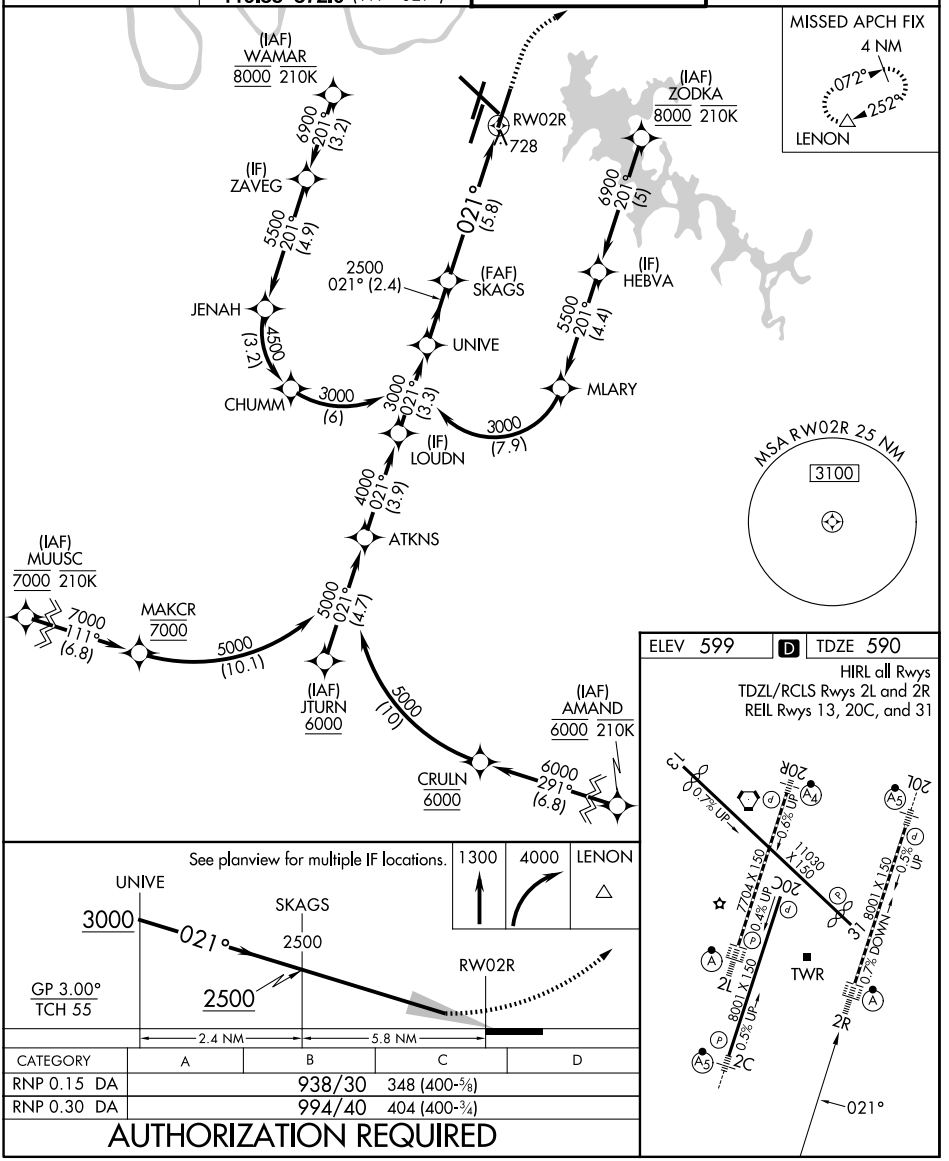

CATEGORY	A	B	C	D
RNP 0.15 DA		938/30	348 (400-⅝)	
RNP 0.30 DA		994/40	404 (400-¾)	

AUTHORIZATION REQUIRED

SE-1, 01 OCT 2026 to 29 OCT 2026
SE-1, 01 OCT 2026 to 29 OCT 2026