RNAV (RNP) Z RWY 31

NASHVILLE INTL (BNA)

APP CRS	Rwy Ldg	9487
316°	TDZE	578
	Apt Elev	599

RNP AR APCH - GPS. Authorization required.

For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C.

MISSED APPROACH: Climb to 1400 then climbing left turn to 4000 direct BEVEE and hold.

D-ATIS	NASHVILLE APP CON	NASHVILLE TOWER	GND CON
135.1	118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	118.6 257.8	121.9 348.6

MISSED APCH FIX

BEVEE

089°

269°

4 NM

RW31

316° (6.2)

(FAF) HOLER

2600

316° (6)

ONUGE

4000

316° (3.5)

(IF) RIKTS

5000


317° (6.1)

(IAF) LLYNN 6000

MSA RW31 25 NM

3100


ELEV 599 D TDZE 578

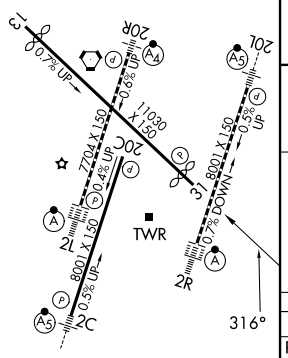

HIRL all Rwys

TDZL/RCLS Rwys 2L and 2R

REIL Rwys 13, 20C, and 31

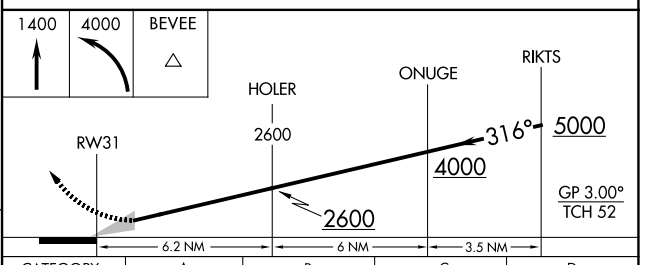

CATEGORY	A	B	C	D
RNP 0.15 DA		914-1	336 (400-1)	
RNP 0.30 DA		1045-1⅜	467 (500-1⅜)	

AUTHORIZATION REQUIRED

SE-1, 01 OCT 2026 to 29 OCT 2026

SE-1, 01 OCT 2026 to 29 OCT 2026