

WAAS CH 78411 W20A	APP CRS 201°	Rwy Ldg TDZE Apt Elev	7702 578 599
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 20R

NASHVILLE INTL (BNA)

RNP APCH - GPS.

▼


▲

LNNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C and D visibility to RVR 6000.


MALSF

MISSED APPROACH:
Climb to 1200 then climbing right turn to 4000 direct BEVEE and hold.

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
------------------------	--	---------------------------------------	-------------------------------

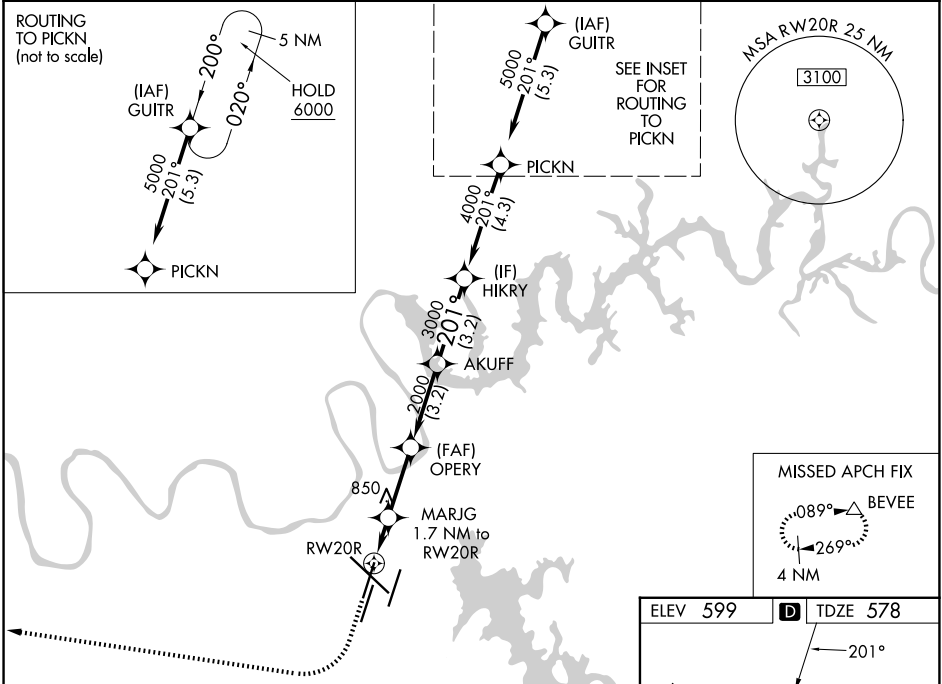

1200 4000 BEVEE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 79).		
	MARJG 1.7 NM to RWY 20R	OPERY 2000	AKUFF 3000
RWY 20R	1160	2000	4000
1.7 NM	2.6 NM	3.2 NM	3.2 NM
CATEGORY	A	B	C
LPV DA	778/40 200 (200-¾)		
LNNAV/VNAV DA	880/40 302 (300-¾)		
LNNAV MDA	980/40	402 (400-¾)	980/50 402 (400-1)
CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1¾ 601 (700-1¾)

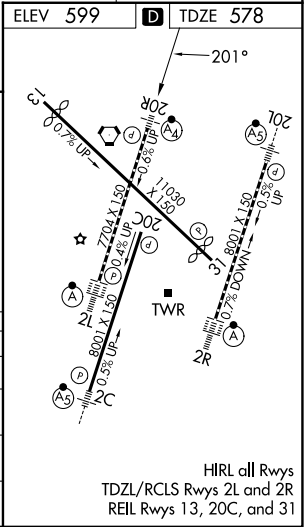

SE-1, 01 OCT 2026 to 29 OCT 2026

SE-1, 01 OCT 2026 to 29 OCT 2026